






SPECIFICATIONS

Rated Current: 7.5AMP
 Contact Resistance: 20mΩ Max
 Withstand Voltage: 1500V AC/DC
 Insulation Resistance: 1000MΩ Min
 Operation Temperature: -40°C to +105°C

Recommended P.C.B Layout(Top Side)
 (PCB BOARD TOLERANCE±0.05)

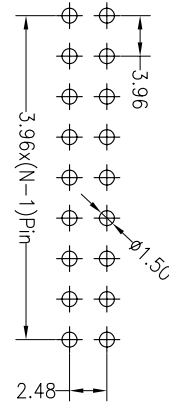


Contact Material: Brass
 Contact Plating: Au or Sn Over Ni
 Insulator Material: Polyester(UL94V-0)
 Standard: LCP
 Max. Processing Temp: 230°C for 30-60 seconds
 (260°C for 10 seconds)

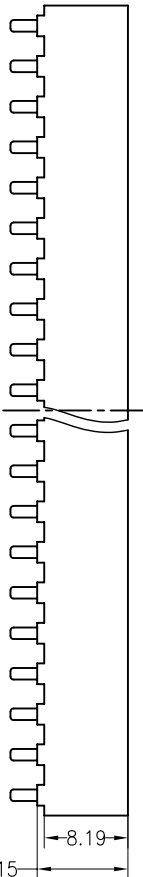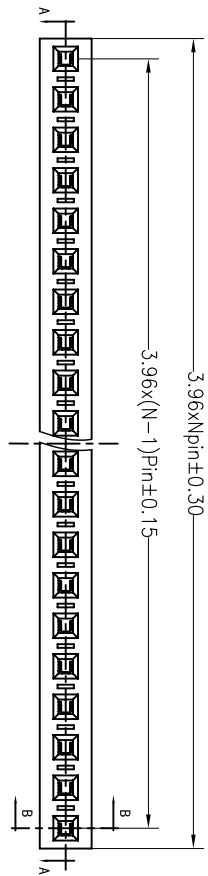

Ordering Information

2890-01 XX X N XX S U 01

No. of Pins Per Row: 1*20
 Insulator Material Option:
 A=BK-PA66
 B=BK-PA66
 C=BK-PA6T
 D=BK-PA46
 F=BK-LCP
 Contact Plating Option:
 G0:Gold Flash
 G2:5U" Gold
 G3:10U" Gold
 G4:15U" Gold
 G5:30U" Gold
 S0:Gold Flash/Tin
 SN:Tin

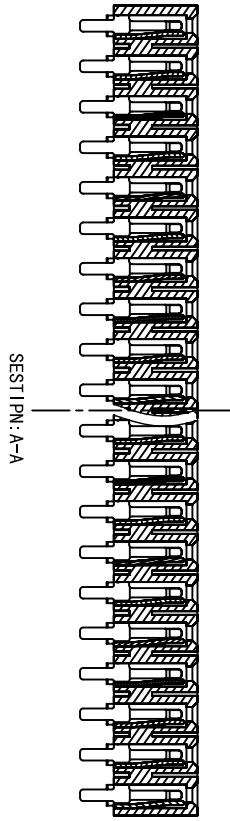

OPERATION		DRAW		SCALE		FIT		BESTCONN(WUHAN) TECHNOLOGY CO.,LTD	
X.X	±0.30	YTYuSheng		12.09.21		UNIT	mm	https://bsconnector.com/	
X.XX	±0.20	CHECK		SIZE	A4	SHEET	1/1	PART NO.	2890-01XXXXXSU01
X.XXX	±0.10	APPROVE		ANGLE	±3°	PROJ.	◆	TITLE:	3.96PF H8.89mm 1xNpin 180°
REV	DATE	MODIFICATION DESCRIPTION		CHANGE	DIM	TOL		客户料号:	
1				4				7	
A	A0	NEW DRAWING		5				8	
				6				9	