



SPECIFICATIONS





Rated Current: 1.0AMP
 Contact Resistance: 20mΩ Max
 Withstand Voltage: 500V AC/DC
 Insulation Resistance: 1000MΩ Min
 Operation Temperature: -40°c to +105°c

Contact Material: Brass
 Contact Plating: Au or Sn Over Ni
 Insulator Material: Polyester (UL94V-0)
 Standard: PA6T
 Max. Processing Temp: 230°C for 30-60 seconds
 (260°C for 10 seconds)

Ordering Information

3230 XX R XX X B K00 X 01

- No. of Pins 6-100P
- Contact Plating Option: G0: Gold Flash, G1: 3U" Gold, G2: 5U" Gold, G3: 10U" Gold, G4: 15U" Gold, G5: 30U" Gold, S0: Gold Flash/Tin, SN: Tin
- Insulator Material Option: A=BK-PBT, B=BK-PA66, C=BK-PA6T, D=BK-PA46, E=BK-PA9T, F=BK-LCP
- Packing Option: O=PE Bag, A=Troy, T=Tube, P=Tube+Cap, R=Reel+Cap, M=Reel+Mylar

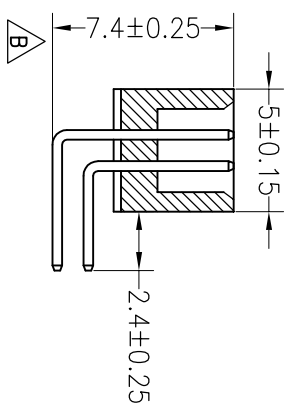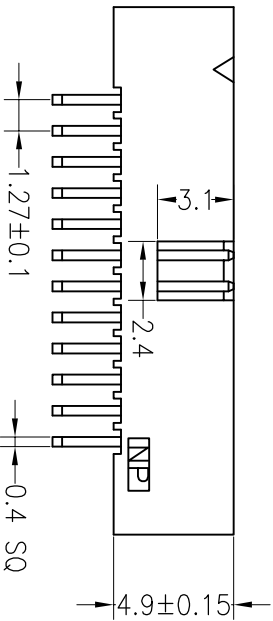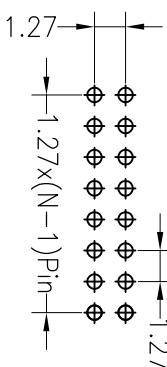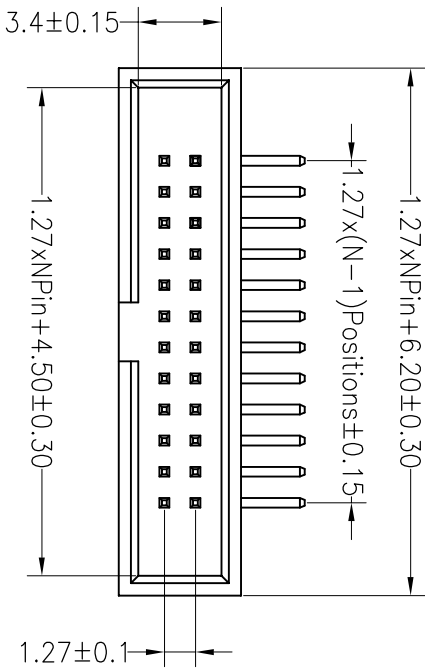

OPERATION		DRAW		SCALE	FIT	BESTCONN(WUHAN) TECHNOLOGY CO.,LTD https://bsconnector.com/		
X.X	±0.30	yyusheng	14.10.18	UNIT	mm			
CHECK		CHECK		SIZE	A4	PART NO. 3230XXRXXXBK00X01		
X.XXX	±0.10			SHEET	1/1			
REV	DATE	MODIFICATION DESCRIPTION		ANGLE	±3°	TITLE:		1.27Box Header Npin H4.9 90° L=10.0/12.5
1		2	CHANGE	DIM	TOL	APPROVE	PROJ.	