

SPECIFICATIONS

Rated Current:3.0AMP
 Contact Resistance:20mΩ Max
 Withstand Voltage:1000V AC/DC
 Insulation Resistance:1000MΩ Min
 Operation Temperature:-40°c to +105°c

Contact Material:Brass
 Contact Plating:Au or Sn Over Ni
 Insulator Material:Polyester(Ul94V-0)
 Standard: PA6T
 Max.Processing Temp: 230°C for 30-60 seconds
 (260°C for 10 seconds)

Ordering Information

3310 XX S XX X X X X 0X


No. of Pins 6-64
 Contact Plating
 G0:Gold Flash
 G1:1U" Gold
 G2:1.5U" Gold
 G3:2U" Gold
 G4:3U" Gold
 G5:5U" Gold
 G6:10U" Gold
 G7:15U" Gold
 S:Gold Flash/Tin Shtn

Insulator Material Option
 A=BK-PBT
 C=BK-PA6T
 D=BK-PA6T
 F=BK-LCP


Color Type
 B=Black
 G=Grey

Latch Type
 L=Long Latch
 S=Short Latch
 N=Without Latch





Packing
 O=PE Bag
 L=Long Tray
 A=Tray
 T=Tube
 P=Tube+Cap

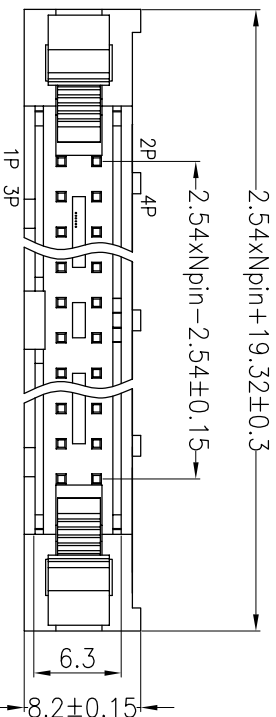

Recommended P.C.B Layout(Top Side)
 (PCB BOARD TOLERANCE±0.05)

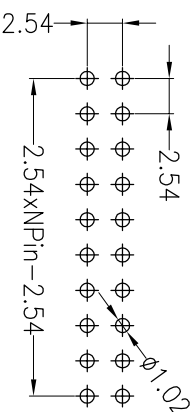

below 20Pos without the central hole

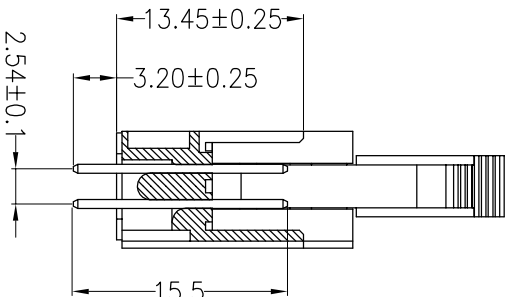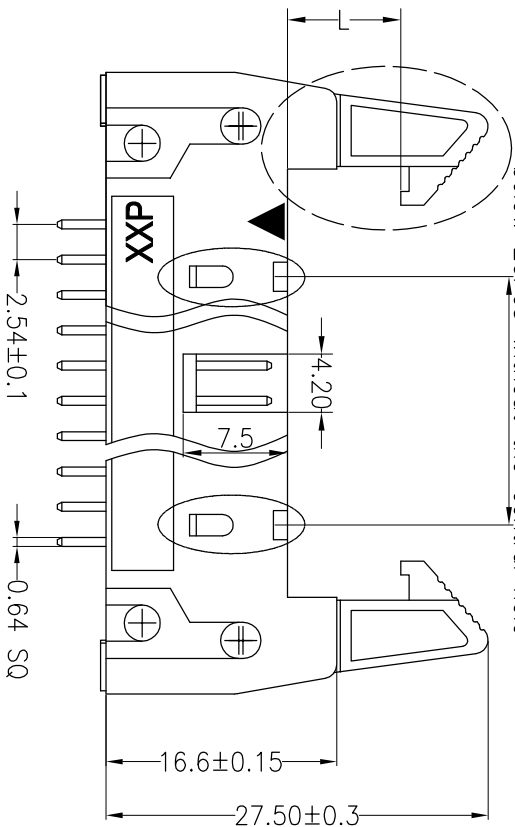

OPERATION		DRAW		SCALE	FIT	BESTCONN(WUHAN) TECHNOLOGY CO.,LTD		
X.X		yiyusheng		UNIT	mm	https://bsconnector.com/		
X.XX		±0.20		SIZE	A4	PART NO. 3310XXSXXXXXXXXX		
X.XXX		±0.10		SHEET	1/1	TITLE: 2.54 ejector header Npin 180°		
ANGLE	±3°	APPROVE		PROU.				
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	DIM	TOL			
A0	2016.05.21	NEW DRAWING						
1								