
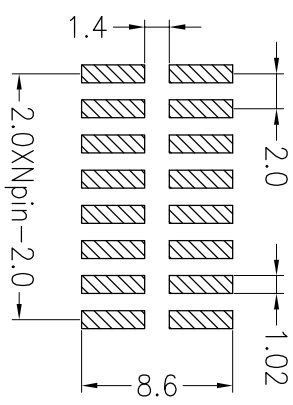


SPECIFICATIONS

Rated Current:1.50AMP
 Contact Resistance:20mΩ Max
 Withstand Voltage:500V AC/DC
 Insulation Resistance:800MΩ Min
 Operation Temperature:-40°c to +105°c

Contact Material:Brass
 Contact Plating:Au or Sn Over Ni
 Insulator Material:Polyester (UL94V-0)
 Standard: PA6T
 Max.Processing Temp: 230°C for 30-60 seconds
 (260°C for 10 seconds)



Recommended P.C.B Layout(Top Side)
 (PCB BOARD TOLERANCE±0.05)

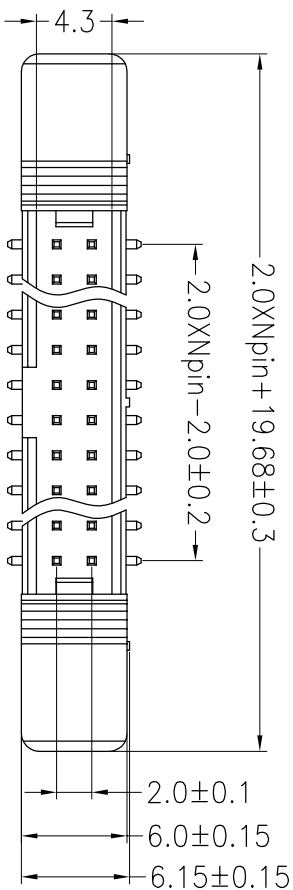

Ordering Information

3320 XX M XX X X L X X 0X

- No. of Pins 6--64
- Contact Plating: G0:Gold Flash, G1:1"U" Gold, G2:1.5U" Gold, G3:2U" Gold, G4:3U" Gold, G5:5U" Gold, S0:Gold Flash/Tin, SN:Tin
- Insulator Material Option: A=BK-PBT, C=BK-PA6T, D=BK-PA46, E=BK-PA9T, F=BK-LCP
- Color Type: B=Black, G=Grey
- Latch Type: L=Long Latch
- Positioning: O=PE Bag, A=Toy, T=Tube

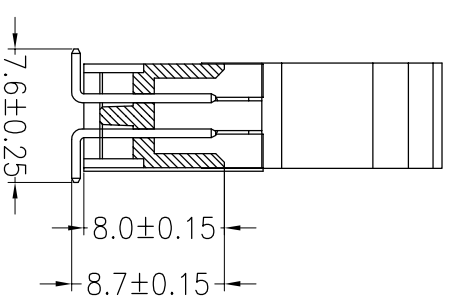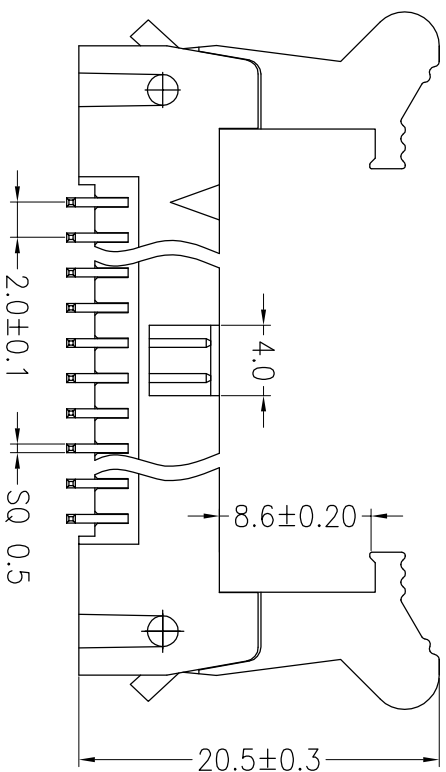

OPERATION		DRAW		SCALE		FIT		BESTCONN(WUHAN) TECHNOLOGY CO.,LTD https://bsconnector.com/	
X.X	±0.30	YYuSheng	19.10.05	UNIT	mm	A4			
CHECK		CHECK		SIZE		SHEET		PART NO. 3320XXXXXXXLX0X 2.0 ejector header Npin SMT 长耳	
X.XXX	±0.10	X.XXX	±0.10	ANGLE	±3°	1/1			
REV	DATE	MODIFICATION DESCRIPTION		CHANGE	DIM	TOL	APPROVE	TITLE:	
A0	2019.10.05	NEW DRAWING							
1									

BESTCONN(WUHAN) TECHNOLOGY CO.,LTD

<https://bsconnector.com/>

PART NO. 3320XXXXXXXLX0X

TITLE: 2.0 ejector header Npin SMT 长耳