
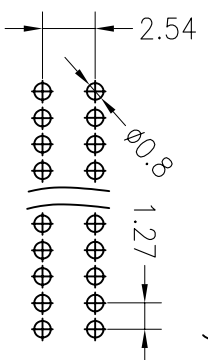


SPECIFICATIONS

Rated Current:1.0AMP
 Contact Resistance:20mΩ Max
 Withstand Voltage:500V AC/DC
 Insulation Resistance:1000MΩ Min
 Operation Temperature:-40°c to +105°c

Contact Material:Brass
 Contact Plating:Au or Sn Over Ni
 Insulator Material:Polyester(UL94V-0)
 Standard: PA6T
 Max.Processing Temp: 230°C for 30-60 seconds
 (260°C for 10 seconds)


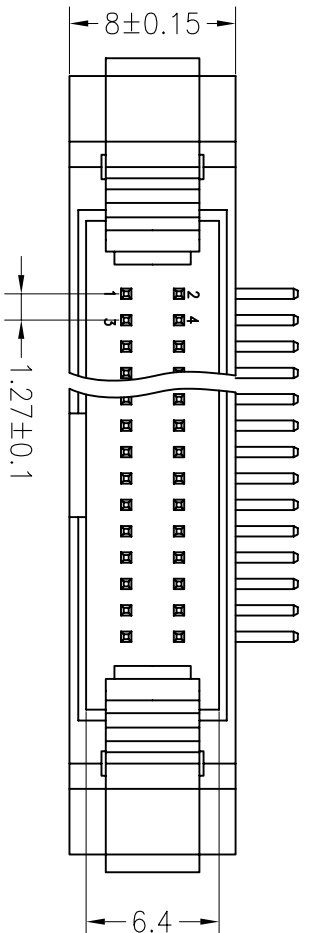


Recommended P.C.B Layout(Top Side)
 (PCB BOARD TOLERANCE±0.05)

Ordering Information

3340 XX R XX X X L X 01

- No. of Pins: 10--100
- Contact Plating: 60:Gold Flash, G2:5U" Gold, G3:10U" Gold, G4:15U" Gold, G5:30U" Gold, S0:Gold Flash/Tin
- Insulator Material Option: A=BK-PBT, B=BK-PA66, C=BK-PA6T, D=BK-PA46, F=BK-LCP
- Color Type: B=Black, G=Grey
- Pinching: T=Tube, A=Tray, P=Tube+Cap

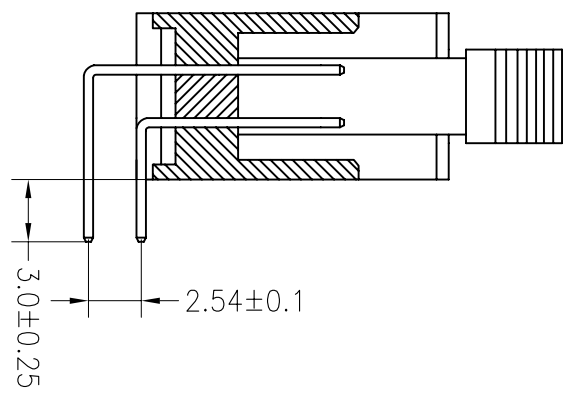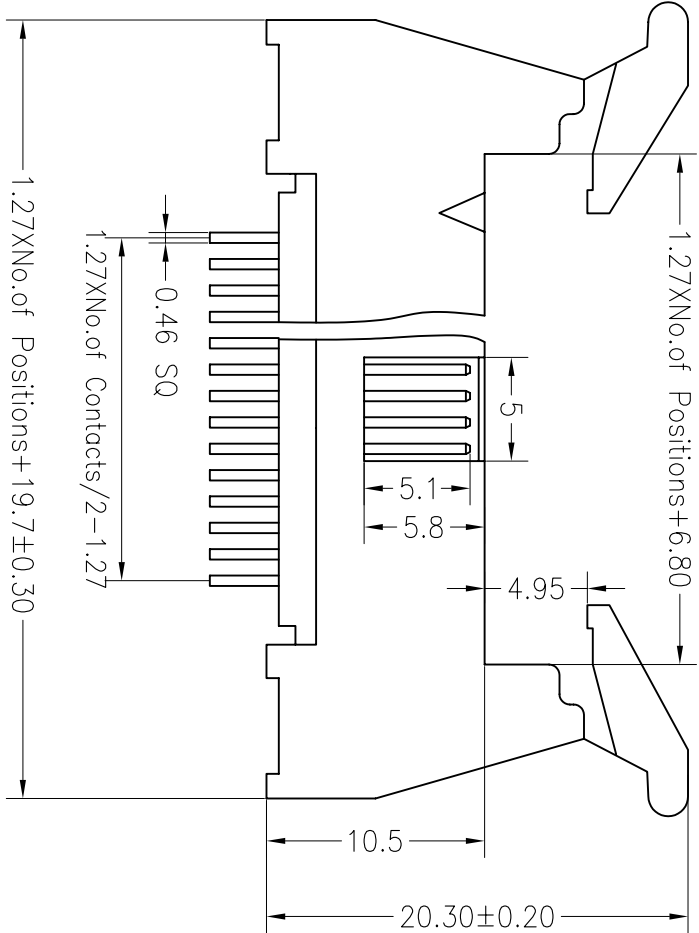

OPERATION		DRAW		SCALE		FIT		BESTCONN(WUHAN) TECHNOLOGY CO.,LTD	
X.X		±0.30		YTYuSheng		12.10.05		UNIT	
X.XX		±0.20		CHECK		A4		mm	
X.XXX		±0.10		APPROVE		1/1		SIZE	
Angle		±3°		PROJ.		1/1		SHEET	
DIM		TOL		PART NO.		3340XXXXXXLX01		TITLE:	
CHANGE		DIM		1.27*2.54mm ejector header Npin		90°		A0	
MODIFICATION DESCRIPTION		DATE		REV		1		A0	
NEW DRAWING		2012.10.05		1		1		A0	

<https://bsconnector.com/>

BESTCONN(WUHAN) TECHNOLOGY CO.,LTD

PART NO. 3340XXXXXXLX01

TITLE: 1.27*2.54mm ejector header Npin 90°