HSF RoHS

FILE NO:E362810

SPECIFICATIONS
Rated Current:3.0AMP
Contact Resistance:30mΩ Max
Withstand Voltage:1000V AC/DC
Insulation Resistance:1000MΩ Min
Operation Temperature:−40°c to +105°c

Contact Material:Brass
Contact Plating:Au or Sn Over Ni
Insulator Material:Polyester(UL94V−0)
Standard: PBT
Max.Processing Temp: 180°C for 30−60 seconds
(200°C for 5 seconds)

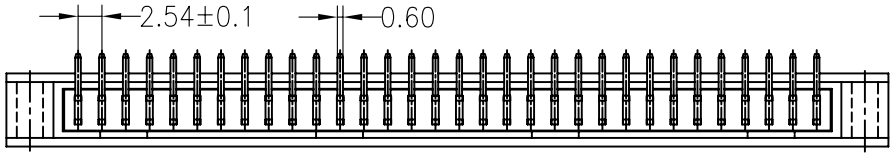

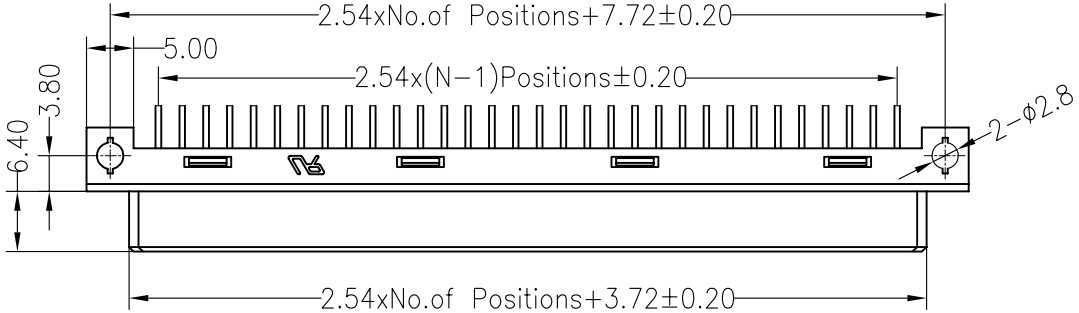



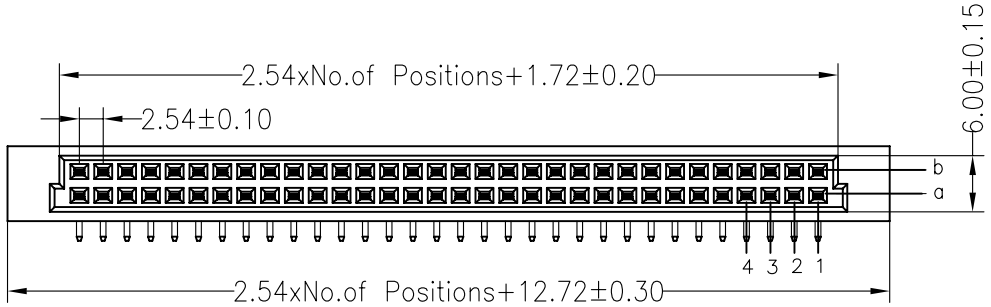

Ordering Information

3511 2 XX A F R XX B N 01

- XX — No.of Pins: 16−64P
- F — Contact Type: M=male, F=Female
- XX — Contact Plating: G0:Gold Flash, S2:1.5U" Gold, S3:2U" Gold, S4:3U" Gold, S5:5U" Gold, S0:Gold Flash/Tin, SN:Tin

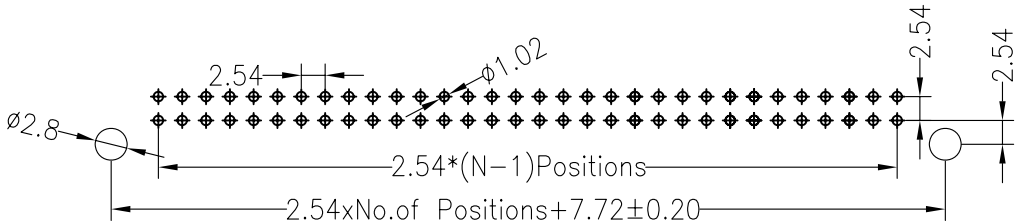

Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)

Dimension antitheses list	
ITEM	A
Standard	2.90
Alternate	

REV	DATE	MODIFICATION DESCRIPTION	CHANGE
B	2014.09.16	增加UL标识	

OPERATION			
X.X	±0.30	DRAW	
X.XX	±0.20	CHECK	
X.XXX	±0.10		
Angle	±3°	APPROVE	
DIM	TOL		

SCALE	FIT
UNIT	mm
SIZE	A4
SHEET	1/1
PROJ.	

BESTCONN(WUHAN) TECHNOLOGY CO.,LTD
https://bscconnector.com/

PART NO.	35112XXAFRXXBN01
TITLE:	欧式插座 母座 90度 2xNPIN 成品系列图