

**SPECIFICATIONS**





Rated Current: 3.0AMP  
 Contact Resistance: 20mΩ Max  
 Withstand Voltage: 1000V AC/DC  
 Insulation Resistance: 1000MΩ Min  
 Operation Temperature: -40°C to +105°C

Contact Material: Brass  
 Contact Plating: Au or Sn Over Ni  
 Insulator Material: Polyester (UL94V-0)  
 Standard: PBT  
 Max. Processing Temp: 180°C for 30-60 seconds  
 (200°C for 10 seconds)

**Ordering Information**

3920 XX XX N X L A 01

No. of Pins: 8-64P  
 Contact Plating: G0:Gold Flash  
 G1:3U" Gold  
 G2:5U" Gold  
 G3:10U" Gold  
 G4:15U" Gold  
 G5:30U" Gold  
 S0:Gold Flash/Tin  
 Insulator Color: B=Black  
 G=Grey

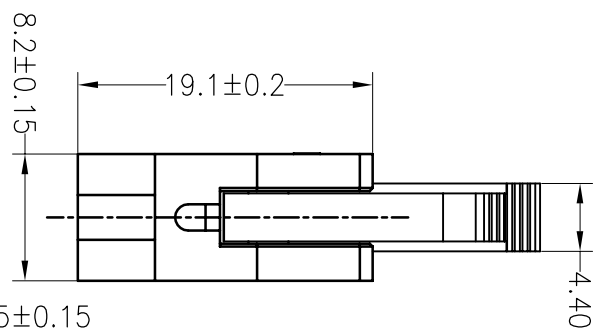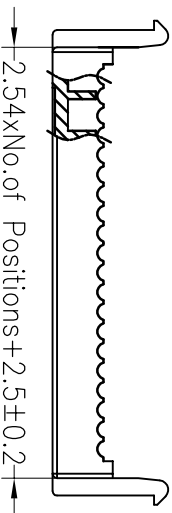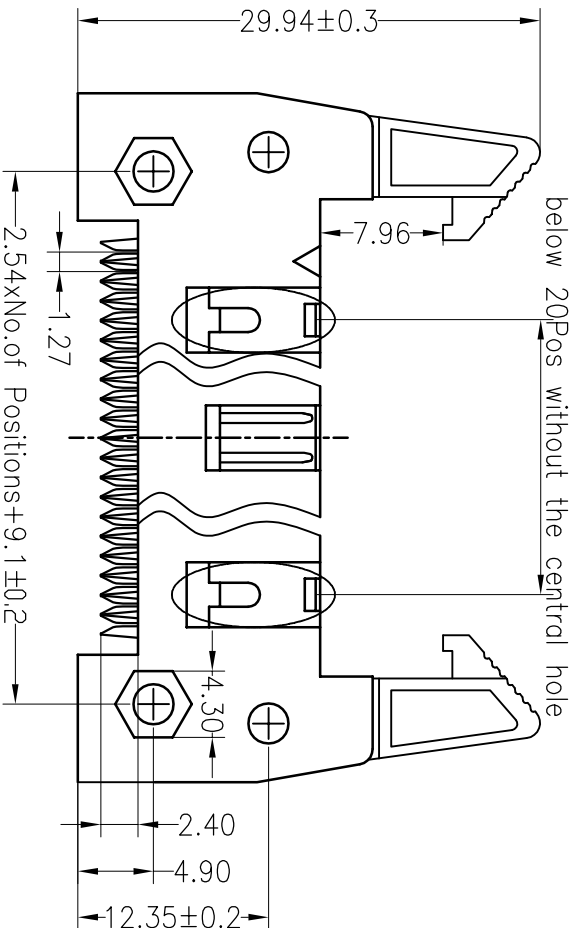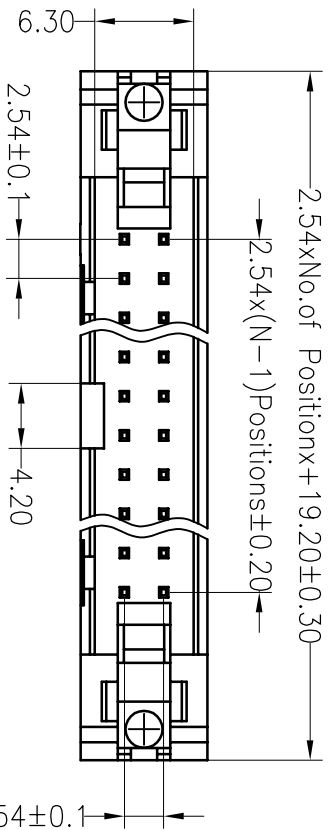

OPERATION		DRAW		SCALE		FIT		BESTCONN(WUHAN) TECHNOLOGY CO.,LTD	
X.X		Y.YuSheng		UNIT		mm		<a href="https://bsconnector.com/">https://bsconnector.com/</a>	
±0.30		14.04.19		SIZE		A4		PART NO. 3920XXXXXXLA01	
X.XX		CHECK		SHEET		1/1		TITLE: 2.54 Ejector Header IDC-TYPE Long Latch	
±0.20				APPROVE					
X.XXX		BEN		PROJ.					
±0.10									
Angle		CHANGE		DIM		TOL			
±3°		4							
MODIFICATION DESCRIPTION		3		5		6		7	
DATE		2		4		3		1	
REV		1		2		3		4	