
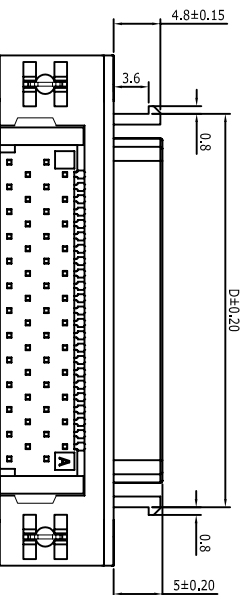





HSF RoHS

SPECIFICATIONS

Housing: Thermoplastic, U94V-0 (PBT)
 Color: Black
 Contact: Copper Alloy
 Shell: Zinc Alloy
 Voltage Current Rating: 1.0AMP, 250V AC
 Insulation Resistance: 500M Ω Min.
 Contact Resistance: 35m Ω Max.
 Dielectric Withstanding Voltage: 500V AC
 Temperature Range: -40 $^{\circ}$ C to +105 $^{\circ}$ C

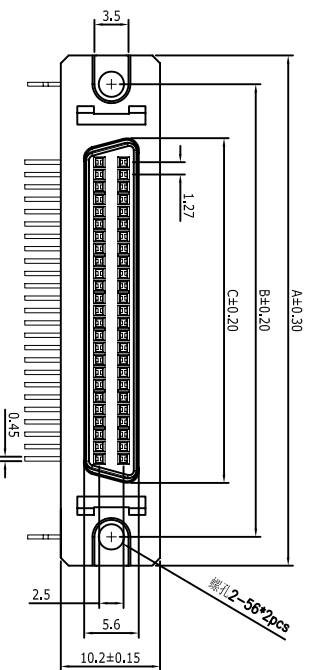

No. of Pins	DIMENSIONS					
	A	B	C	D	E	F
20	33.50	27.60	15.64	20.80	27.60	11.43
26	37.19	31.26	19.45	24.65	31.26	15.24
40	46.10	40.15	28.25	33.70	40.15	24.13
50	52.43	46.50	34.70	40.30	46.50	30.48
68	63.86	57.93	46.13	51.32	57.93	41.91
100	84.18	78.23	66.45	71.50	78.23	62.23

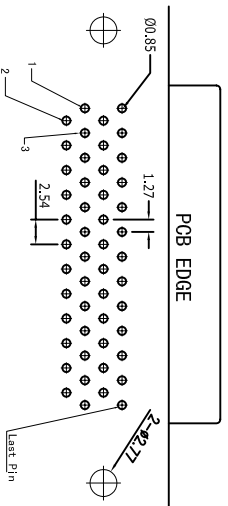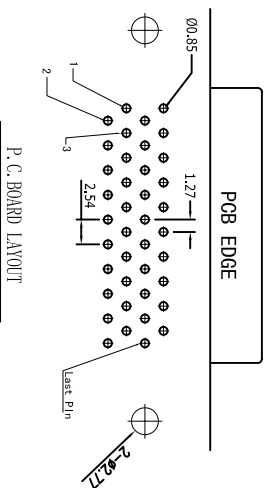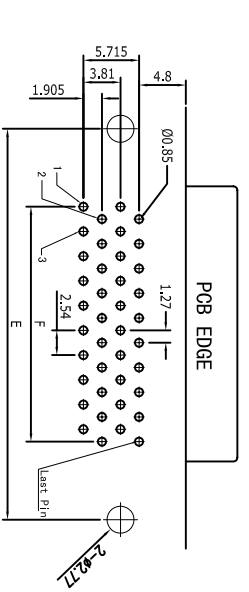

P. C. BOARD LAYOUT
(26,50Pin) R1 Type / 正脚位

P. C. BOARD LAYOUT
(20,40,68,100Pin) R2 Type / 反脚位

P. C. BOARD LAYOUT
(26,50Pin) R2 Type / 反脚位

Ordering Information
 6311-FXXX R D XX MNA01

No. of Pins: 20P, 26P, 40P, 50P, 68P, 100P
 Connector Type: R D
 Realign Angle: XX

Contact Plating: Gt-Gold Flash
 SR-Gold Flash/Tin
 S1:30" Gold/Tin
 S2:50" Gold/Tin
 S3:100" Gold/Tin
 S4:150" Gold/Tin

OPERATION	DRAW	YH/Sheng	14.10.14	SCALE	FTT	BESTCONN(WUHAN) TECHNOLOGY CO.,LTD	
X.X	±0.30			UNIT	mm	https://bsconnector.com/	
X.XX	±0.20	CHECK		SIZE	A4	PART NO.	6311FXXXRDXXMNA01
X.XXX	±0.10			SHEET	1/1	TITLE:	SCSI DB Female 90 $^{\circ}$
Angle	±3 $^{\circ}$	APPROVE		PROJ.			
DIM	TOL						
CHANGE							
MODIFICATION DESCRIPTION							
DATE							
REV							
A0	2014.10.14	NEW DRAWING					