


**SPECIFICATIONS**

Rated(额定参数): 400V,15A  
 Dielectric strength(抗电强度): AC2000V/1 Minute  
 Insulation Resistance(绝缘电阻):1000MΩ Min  
 Contact Resistance(接触电阻):20mΩ Max  
 Screw Torque(扭矩): 0.5Nm (4.5lb.in)  
 Wire Range(线径):1.4~2.2AWG  
 Strip length(剥线长度):6~7mm  
 Temp. range(操作温度): -40°C~+105°C  
 MAX Soldering(瞬时温度):+250°C,5s


Housing Material(塑件): PA66 (UL94 V-0)  
 Contact(端子): Brass, Ni plating(黄铜镀镍)  
 Screw (螺丝): M3.0, Steel, Zinc plating(钢,镀锌)

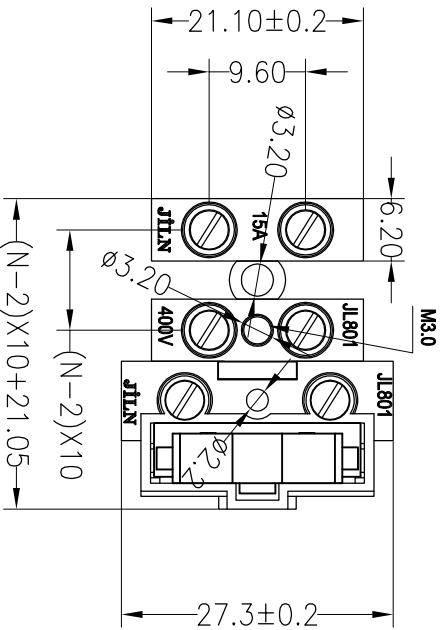

**Ordering Information**

**JL801 - 100 XX E X 1**

Pitch 100=10.0PH  
 No.of pins 1P,2P,3P 4P,5P  
 Housing Color B=Black G=Green U=Blue R=Red W=White Y=Yellow O=Orange E=Grey  
 Packing 0=Pe bog T=Tube A=Tray

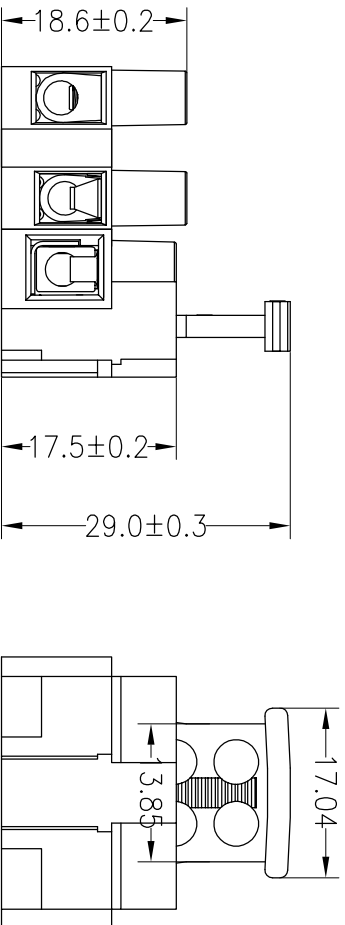

		OPERATION		DRAW		SCALE		FIT		BESTCONN(WUHAN) TECHNOLOGY CO.LTD <a href="https://bsconnector.com/">https://bsconnector.com/</a>	
		X.X	±0.30	Yiyusheng		UNIT		mm		PART NO. JL801-100XXEX1	
		X.XX	±0.20	18.12.03		SIZE		A4		SHEET	
		X.XXX	±0.10	CHECK		SHEET		1/1		PROU.	
		Angle	±3°	APPROVE		TITLE:		10.0mm Feed THROUGH Terminal Blocks			
		DIM	TOL								
REV		DATE	MODIFICATION DESCRIPTION	CHANGE							
1		2018.12.03	NEW DRAWING	4							