

SPECIFICATIONS

Rated(额定参数): 300V,15A
 Dielectric strength(抗电强度): AC1600V/1 Minute
 Insulation Resistance(绝缘电阻):1000MΩ Min
 Contact Resistance(接触电阻):20mΩ Max
 Wire Range(线径):22~14AWG
 Wire Range [mm²]:0.2~2.5mm²
 Strip length(剥线长度):8-9mm
 Temp. range(操作温度):-40°C~+105°C
 MAX Soldering(瞬时温度):+250°C,5s

Housing Material(塑件): PA66 (UL94 V-0)
 Contact(端子): Copper alloy, Sn plated铜合金, 镀锡

PITCH RANGE		NOMINAL DIMENSION RANGE	
IN MM	OVER	IN MM	OVER
TO 6	10	TO 30	60
TO 10	24	TO 60	100
TO 15	±0.25	TO 100	150
	±0.30	TO 150	±1.00
	±0.30	TO 200	±1.30

Ordering Information







JL8EDGK - XXX XX X X 1

Pitch
 500=5.00PH
 508=5.08PH

No. of pins
 2P~24P

Housing Color
 B=Black
 G=Green
 U=Blue
 R=Red
 W=White
 Y=Yellow
 O=Orange
 E=Grey

Packing
 O=Pe bog
 A=Toy
 T=Tube

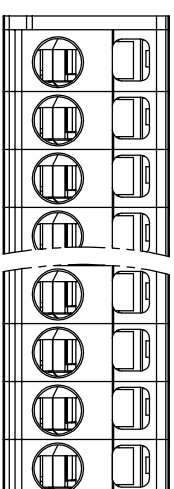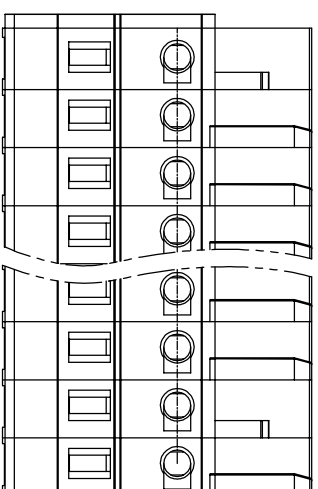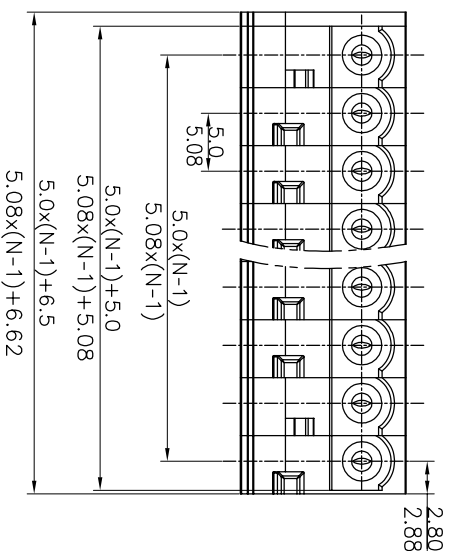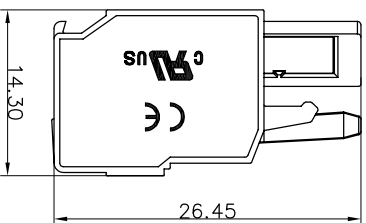

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	OPERATION		DRAW	SCALE	FIT	TITLE:
				DIM	TOL				
A0	2020.06.09	NEW DRAWING		Angle	±3°	yiyusheng	mm	A4	JL8EDGK-XXXXXX1
1						20.06.09			5.0/5.08 Pitch Female NPin Pluggable Terminal Blocks

BESTCONN(WUHAN) TECHNOLOGY CO.,LTD
<https://bsconnector.com/>