
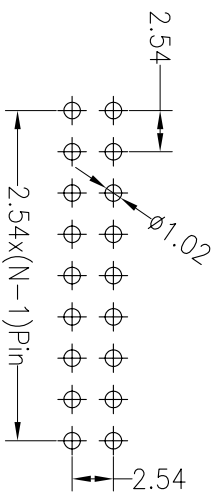


SPECIFICATIONS

Rated Current: 3.0AMP
 Contact Resistance: 20mΩ Max
 Withstand Voltage: 1000V AC/DC
 Insulation Resistance: 1000MΩ Min
 Operation Temperature: -40°C to +105°C

Contact Material: Brass
 Contact Plating: Au or Sn Over Ni
 Insulator Material: Polyester (UL94V-0)
 Standard: PA6T
 Max. Processing Temp: 230°C for 30-60 seconds
 (260°C for 5 seconds)



Recommended P.C.B Layout (Top Side)
 (PCB BOARD TOLERANCE ±0.05)

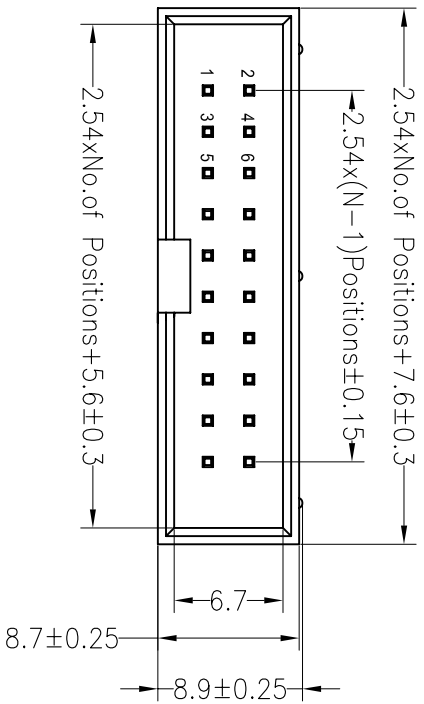

Ordering Information

3210 XX S XX X B D00 X 01

No. of Pins: 6--64
 Contact Plating: G0: Gold Flash, G2: 5U" Gold, G3: 10U" Gold, G4: 15U" Gold, G5: 30U" Gold, SO: Gold Flash/Tin, SN: Tin
 Insulator Material Option: A=BK-PBT, B=BK-PA66, C=BK-PA6T, D=BK-PA46, F=BK-LCP
 Packing: T=Tube, A=Troy, P=Tube+Cap

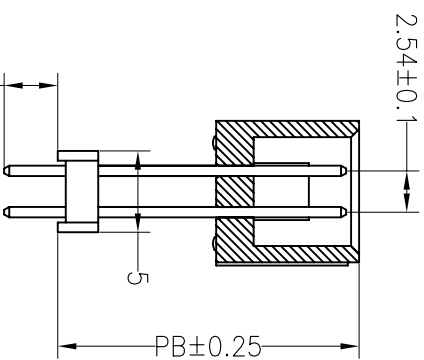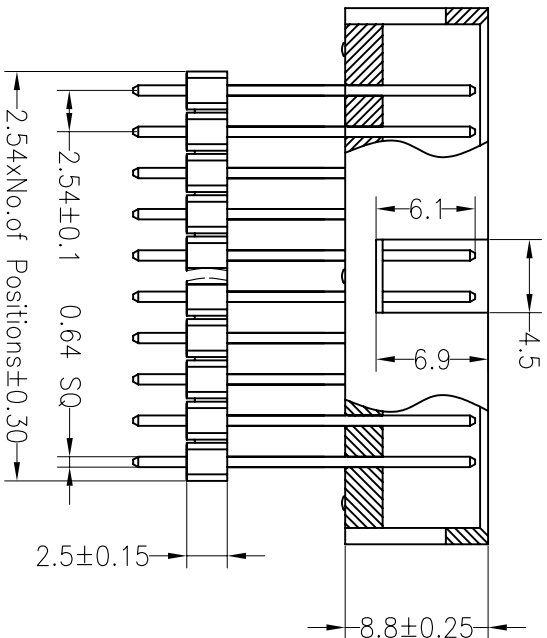

ITEM	PC	PB
Standard	3.30	
Alternate		

OPERATION		DRAW		SCALE		FIT		PART NO.	
X.X	±0.30		YTYuSheng	UNIT	mm	A4	1/1	3210XXSXXXBD00X01	2.54mm Box Header H8.8mm+Pin Header H2.50mm 180°
X.XX	±0.20	CHECK		SIZE	A4				
X.XXX	±0.10			SHEET	1/1				
Angle	±3°	APPROVE		PROJ.					
DIM	TOL								
CHANGE									
DATE		MODIFICATION DESCRIPTION		CHANGE					
REV	DATE								
A0	2012.10.05	NEW DRAWING							
1									

BESTCONN(WUHAN) TECHNOLOGY CO.,LTD
<https://bsconnector.com/>