






**SPECIFICATIONS**

Rated Current: 3.0AMP  
 Contact Resistance: 20mΩ Max  
 Withstand Voltage: 1000V AC/DC  
 Insulation Resistance: 1000MΩ Min  
 Operation Temperature: -40°C to +105°C

Contact Material: Brass  
 Contact Plating: Au or Sn Over Ni  
 Insulator Material: Polyester (UL94V-0)  
 Standard: PBT  
 Max. Processing Temp: 180°C for 30-60 seconds  
 (200°C for 10 seconds)

Recommended P.C.B Layout (Top Side)  
 (PCB BOARD TOLERANCE ±0.05)

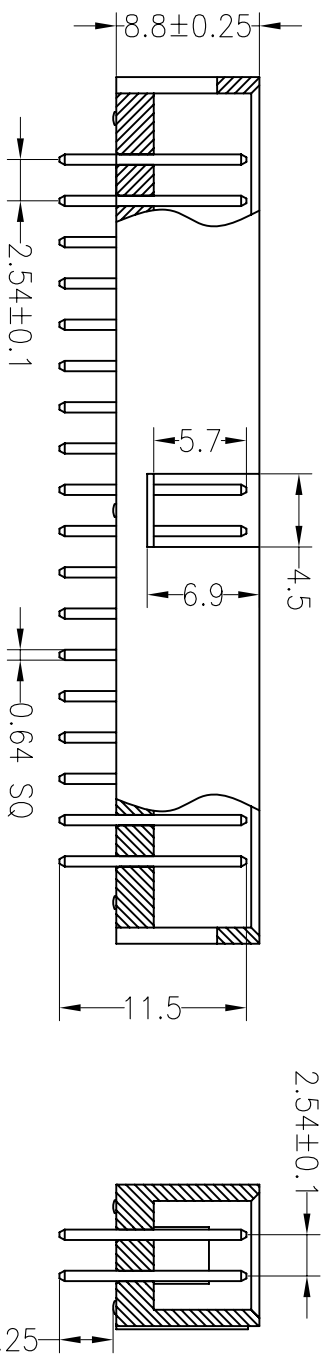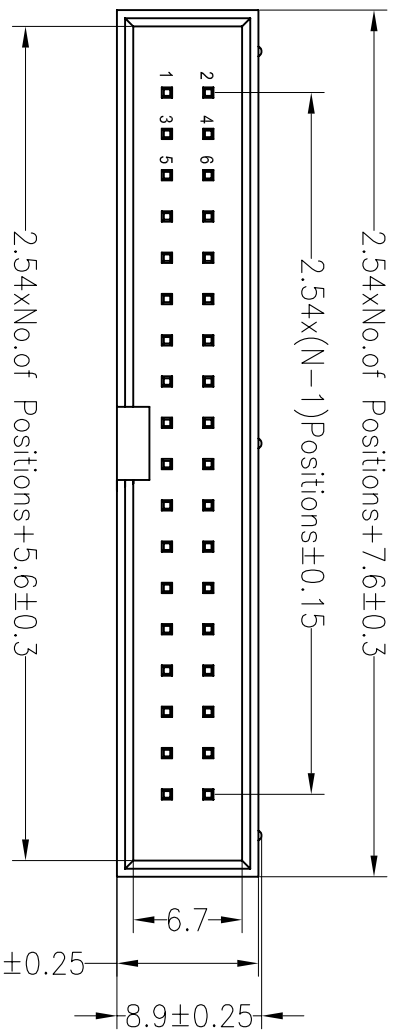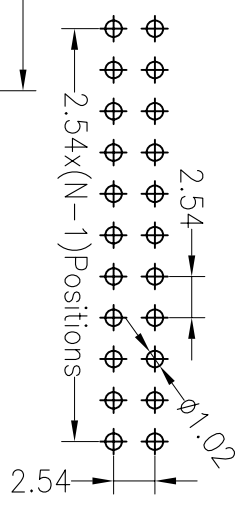

**Ordering Information**

3210 XX S XX X B K00 X 01

- No. of Pins: 6--64
- Contact Plating: G0:Gold Flash, G1:3U" Gold, G2:5U" Gold, G3:10U" Gold, G4:15U" Gold, G5:30U" Gold, S0:Gold Flash/Tin, SN:Tin
- Insulator Material Option: A=BK-PBT, B=BK-PA66, C=BK-PA6T, D=BK-PA46, E=BK-PA9T, F=BK-LCP
- Packing: T=Tube, A=Troy, P=Tube+Cap

OPERATION		DRAW		SCALE		FIT		PART NO.	
X.X	±0.30		YTYuSheng	15.01.28	UNIT	mm	A4	3210XXXXXXBK00X01	
X.XX	±0.20	CHECK			SIZE	A4			
X.XXX	±0.10	APPROVE			SHEET	1/1			
Angle	±3°				PROJ.				
DIM	TOL			TITLE:		2.54mm Box Header H8.8mm 180°			

BESTCONN(WUHAN) TECHNOLOGY CO.,LTD  
<https://bsconnector.com/>