



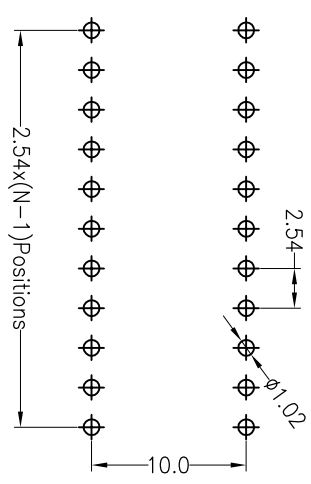

SPECIFICATIONS

Rated Current:3.0AMP
 Contact Resistance:20mΩ Max
 Withstand Voltage:1000V AC/DC
 Insulation Resistance:1000MΩ Min
 Operation Temperature:-40°c to +105°c

Contact Material:Brass
 Contact Plating:Au or Sn Over Ni
 Insulator Material:Polyester(UL94V-0)
 Standard: PA6T
 Max.Processing Temp: 230°C for 30-60 seconds
 (260°C for 10 seconds)


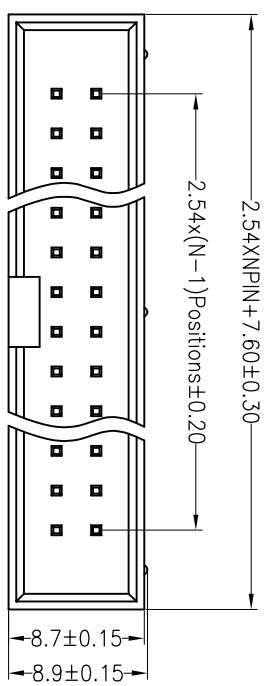


Recommended P.C.B Layout(Top Side)
 (PCB BOARD TOLERANCE±0.05)

Ordering Information

3210- XX W XX X B K00 X 01

- No. of Pins 6--64P
- Contact Plating Option: G0:Gold Flash, G1:1"U" Gold, G2:1.5U" Gold, G3:2U" Gold, G4:3U" Gold, G5:5U" Gold, S0:Gold Flash/Tin, SN:Tin
- Insulator Material Option: A=BK-PBT, C=BK-PA6T, D=BK-PA46, E=BK-PA9T, F=BK-LCP
- Packing Option: O=PE Bag, A=Tray, T=Tube, P=Tube+Cap

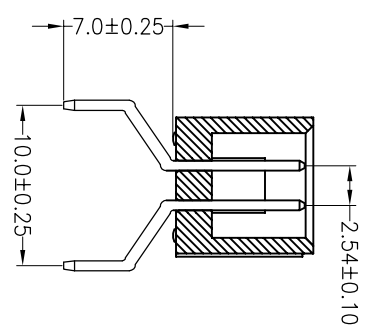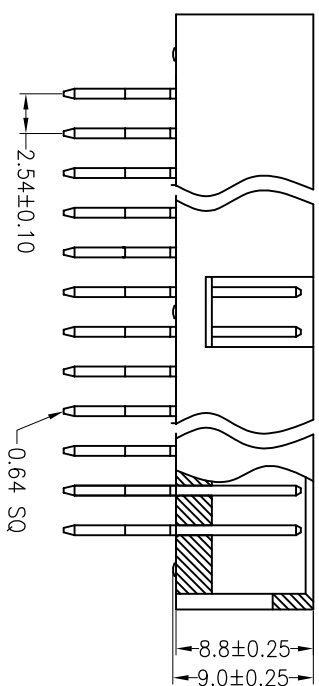

OPERATION		DRAW		SCALE		FIT		BESTCONN(WUHAN) TECHNOLOGY CO.,LTD	
X.X	±0.30	Y.YuSheng	19.03.28	UNIT	mm			https://bscconnector.com/	
X.XX	±0.20	CHECK		SIZE	A4	PART NO.		3210-XXWXXXBK00X01	
X:XXX	±0.10			SHEET	1/1	TITLE:		2.54mm Box Header H8.8mm 焊板脚	
Angle	±3°	APPROVE		PROJ.					
DIM	TOL								

REV	DATE	MODIFICATION DESCRIPTION	CHANGE					
A0	2019.03.28	NEW DRAWING						
1								