





**SPECIFICATIONS**

Rated Current:3.0AMP  
 Contact Resistance:20mΩ Max  
 Withstand Voltage:1000V AC/DC  
 Insulation Resistance:1000MΩ Min  
 Operation Temperature:-40°c to +105°c

Contact Material:Brass  
 Contact Plating:Au or Sn Over Ni  
 Insulator Material:Polyester(UL94V-0)  
 Standard: PA6T  
 Max.Processing Temp: 230°C for 30-60 seconds  
 (260°C for 10 seconds)

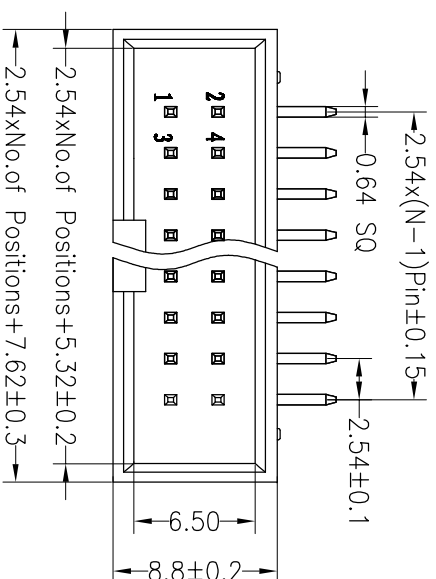



Recommended P.C.B Layout(Top Side)  
 (PCB BOARD TOLERANCE±0.05)

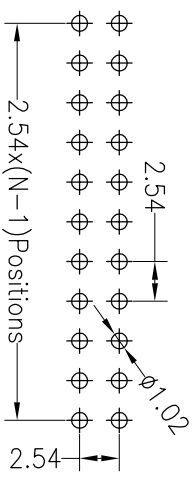

**Ordering Information**

**3217 XX R XX X B K00 A 01**

- No. of Pins 6--64
- Contact Plating Option
- Insulator Material
- Packing
- No. of Pins 6--64
- G0:Gold Flash
- G1:3U" Gold
- G2:5U" Gold
- G3:10U" Gold
- G4:15U" Gold
- G5:30U" Gold
- S0:Gold Flash/Tin
- SN:Tin
- Option
- A=BK-PBT
- B=BK-PA66
- C=BK-PA6T
- D=BK-PA46
- E=BK-PA9T
- F=BK-LCP
- Packing
- T=Tube
- A=Tray
- P=Tube+Cap

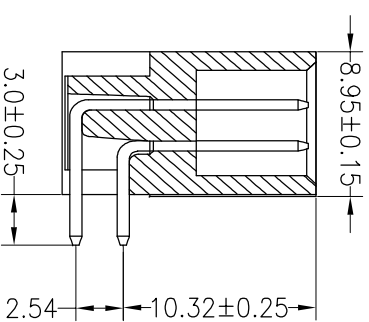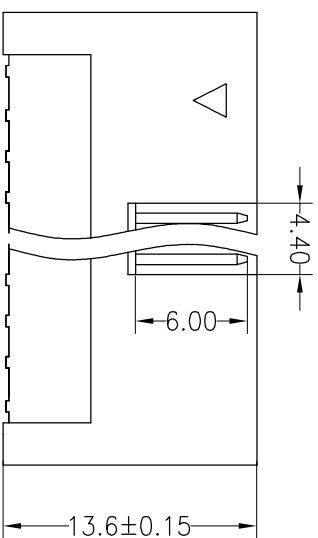

OPERATION		DRAW		SCALE		FIT		BESTCONN(WUHAN) TECHNOLOGY CO.,LTD	
X.X	±0.30	YYuSheng	15.01.28	UNIT	mm	A4	1/1	<a href="https://bsconnector.com/">https://bsconnector.com/</a>	
X.XX	±0.20	CHECK		SIZE	A4	PART NO.		3217XXXXXXBK00A01	
X.XXX	±0.10	APPROVE		SHEET	1/1	TITLE:		2.54mm Box Header H13.6mm 90°	
REV	DATE	MODIFICATION DESCRIPTION		CHANGE	DIM	TOL			
1	2015.01.28	NEW DRAWING							