HSF RoHS

FILE NO :E362810

SPECIFICATIONS
Rated Current:1.5AMP
Contact Resistance:20mΩ Max
Withstand Voltage:400V AC/DC
Insulation Resistance:800MΩ Min
Operation Temperature:−40°c to +105°c

Contact Material:Brass
Contact Plating:Au or Sn Over Ni
Insulator Material:Polyester(UL94V−0)
Standard: PA6T
Max.Processing Temp: 230°C for 30−60 seconds
(260°C for 10 seconds)

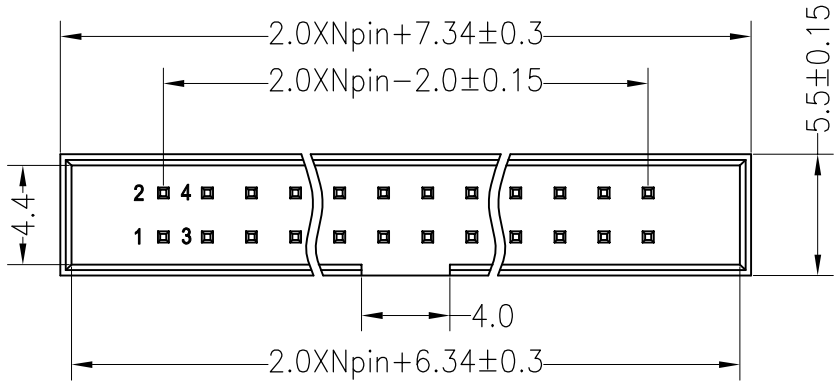

Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)

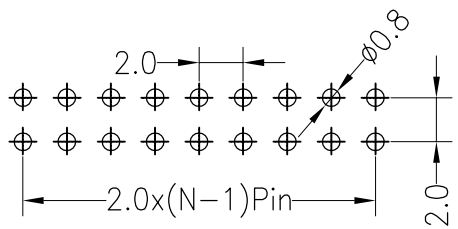

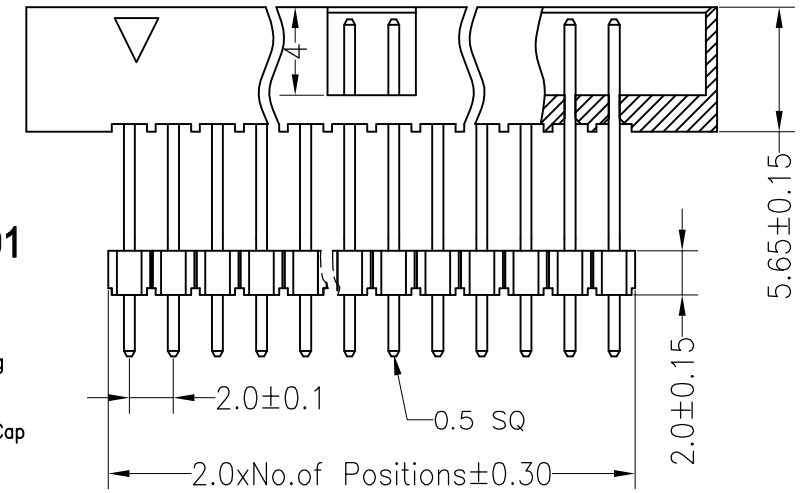

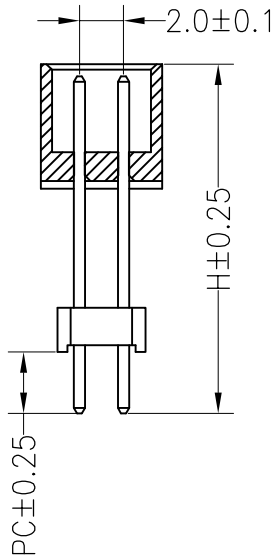

Ordering Information

3220 XX S XX X B D01 X 01

- No.of Pins: 6−−68P
- Contact Plating:
  - G0:Gold Flash
  - G1:1U" Gold
  - G2:1.5U" Gold
  - G3:2U" Gold
  - G4:3U" Gold
  - G5:5U" Gold
  - S0:Gold Flash/Tin
  - SN:Tin
- Insulator Material Option:
  - A=BK−PBT
  - C=BK−PA6T
  - D=BK−PA46
  - E=BK−PA9T
  - F=BK−LCP
- Packing:
  - 0=PE Bag
  - A=Tray
  - T=Tube
  - P=Tube+Cap

Dimension antitheses list			
ITEM	H	PC	L
Alternate	22.20	2.80	22.00

REV	DATE	MODIFICATION DESCRIPTION	CHANGE
A0	2017.10.26	NEW DRAWING	

OPERATION				
DRAW	JNCHENGXIN	17.10.26	SCALE	FIT
			UNIT	mm
CHECK			SIZE	A4
			SHEET	1/1
APPROVE			PROJ.	

DIM	TOL
X.X	±0.30
X.XX	±0.20
X.XXX	±0.10
Angle	±3°

BESTCONN(WUHAN) TECHNOLOGY CO.,LTD
https://bscconnector.com/

PART NO. 3220−XXSXXXBD01X01

TITLE: 2.0Box Header Npin H5.65+H2.0 180°