

SPECIFICATIONS

Rated Current:1.5AMP
 Contact Resistance:20mΩ Max
 Withstand Voltage:400V AC/DC
 Insulation Resistance:800MΩ Min
 Operation Temperature:-40°c to +105°c



Contact Material:Brass

Contact Plating: Au or Sn Over Ni

Insulator Material: Polyester(UL94V-0)

Standard: PA6T



Max. Processing Temp: 230°C for 30-60 seconds
 (260°C for 10 seconds)

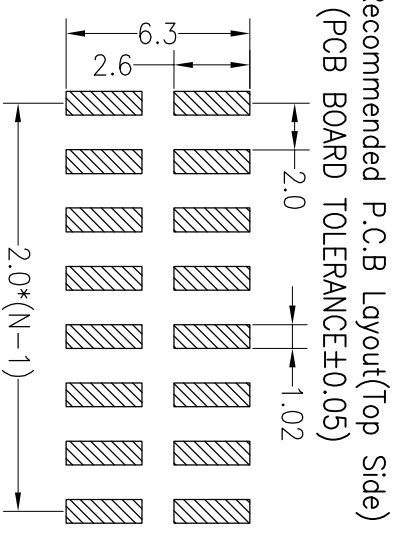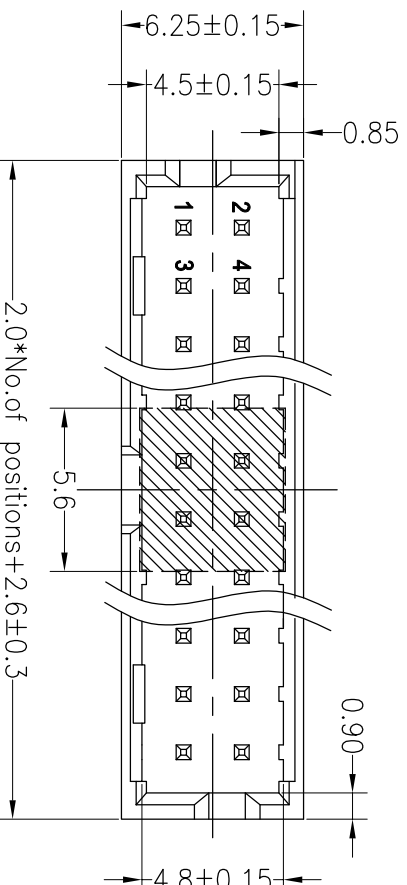

Ordering Information

3221-XX M XX XB K00 X 01

- No. of Pins 6---64P
- Contact Plating
G0:Gold Flash
G1:1U" Gold
G2:1.5U" Gold
G3:2U" Gold
G4:3U" Gold
G5:5U" Gold
S0:Gold Flash/Tin
SN:Tin
- Insulator Material
Option
A=BK-PBT
C=BK-PA6T
D=BK-PA66
E=BK-PA9T
F=BK-LCP
- Packing
O=PE Bag
A=Troy
T=Tube
P=Tube+Cap

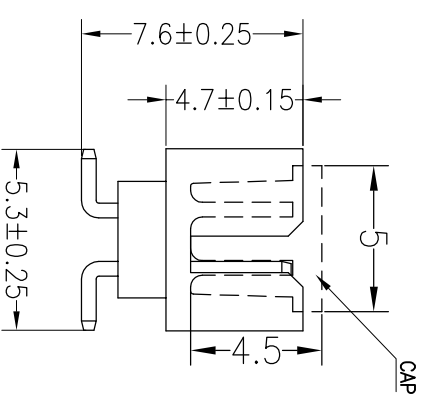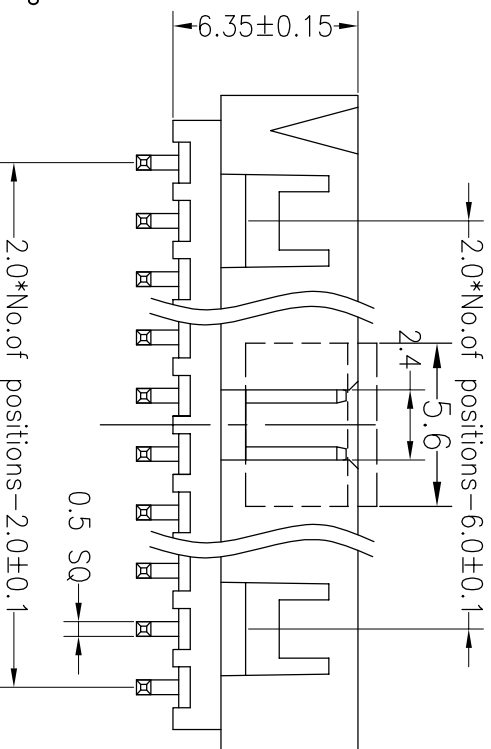

OPERATION		DRAW		SCALE		FIT		BESTCONN(WUHAN) TECHNOLOGY CO.,LTD	
X.X	±0.30	Y.YuSheng	19.09.18	UNIT	mm	A4	1/1	https://bscconnector.com/	
X.XX	±0.20	CHECK		SIZE	A4	SHEET		PART NO.	
X:XXX	±0.10	APPROVE		ANGLE	±3°	PROJ.		3221-XXMXXBKK00X01	
REV	DATE	MODIFICATION DESCRIPTION		CHANGE	DIM	TOL	TITLE:		
1	2019.09.18	NEW DRAWING					2.0Box Header Npin H6.35 SMT		