


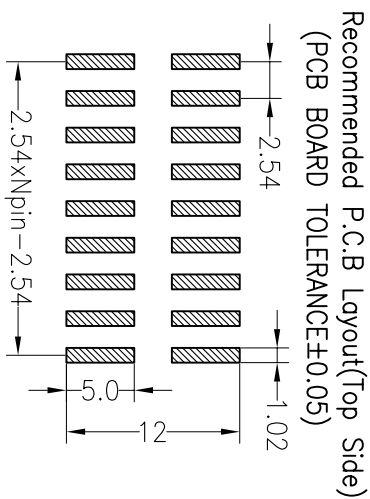


SPECIFICATIONS

Rated Current:3.0AMP
 Contact Resistance:20mΩ Max
 Withstand Voltage:1000V AC/DC
 Insulation Resistance:1000MΩ Min
 Operation Temperature:-40°C to +105°C

Contact Material:Brass
 Contact Plating:Au or Sn Over Ni
 Insulator Material:Polyester(UL94V-0)
 Standard: PA6T
 Max.Processing Temp: 230°C for 30-60 seconds
 (260°C for 10 seconds)

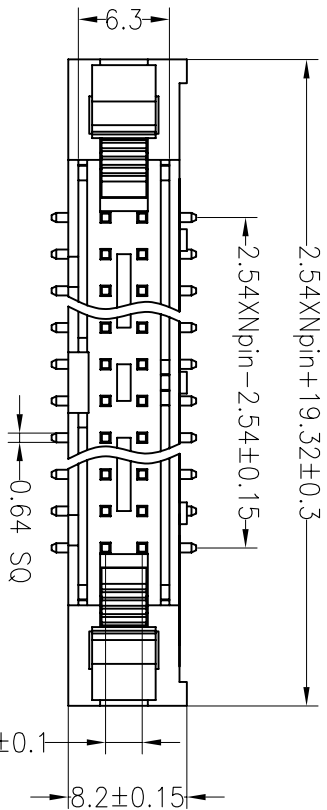

Ordering Information

3310 XX M XX X X X X 0 1



No. of Pins 6-64
 Contact Plating G0:Gold Flash
 G1:3U" Gold
 G2:5U" Gold
 G3:10U" Gold
 G4:15U" Gold
 G5:30U" Gold
 S0:Gold Flash/Tin
 SN:Tin
 SM:Matte-Tin

Insulator Material Option
 A=BK-PBT
 B=BK-PA66
 C=BK-PA6T
 D=BK-PA46
 F=BK-PA9T
 F=BK-LCP

Color Type
 B=Black
 G=Grey

Latch Type
 L=Long Latch
 S=Short Latch
 N=Without Latch

Packing
 0=Pe Bag
 T=Tube
 P=Tube+Cap
 R=Reel+Cap

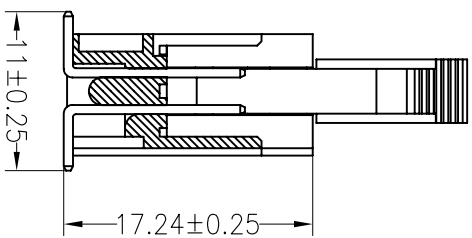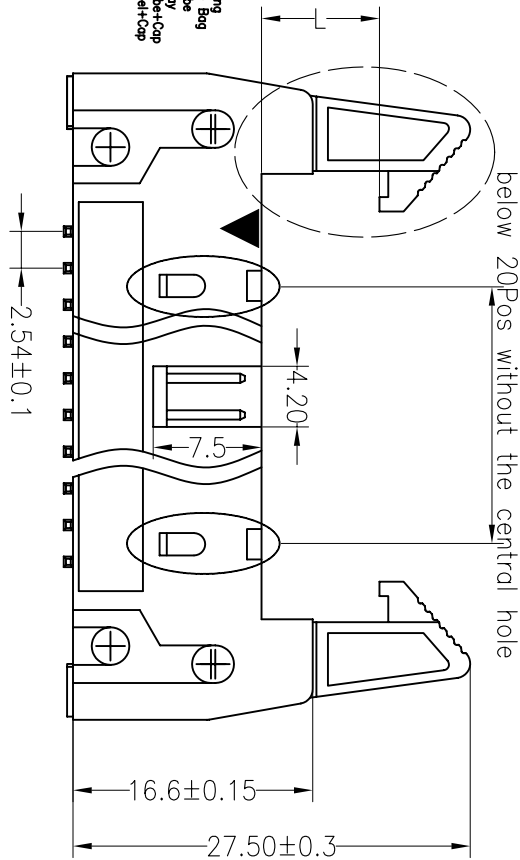

OPERATION		DRAW		BEN		SCALE		FIT	
X.X		±0.30				UNIT		mm	
X.XX		±0.20				SIZE		A4	
X.XXX		±0.10				SHEET		1/1	
Angle		±3°				PROJ.		1	
DIM		TOL							
BESTCONN(WUHAN) TECHNOLOGY CO.,LTD									
https://bsconnector.com/									
PART NO.					3310XXMXXXXXX01				
TITLE:					2.54 ejector header Npin SMT				