HSF RoHS

FILE NO :E362810

SPECIFICATIONS
Rated Current:1.5AMP
Contact Resistance:20mΩ Max
Withstand Voltage:500V AC/DC
Insulation Resistance:800MΩ Min
Operation Temperature:−40°c to +105°c

Contact Material:Brass
Contact Plating:Au or Sn Over Ni
Insulator Material:Polyester(UL94V−0)
Standard: PA6T
Max.Processing Temp: 230°C for 30−60 seconds
(260°C for 10 seconds)

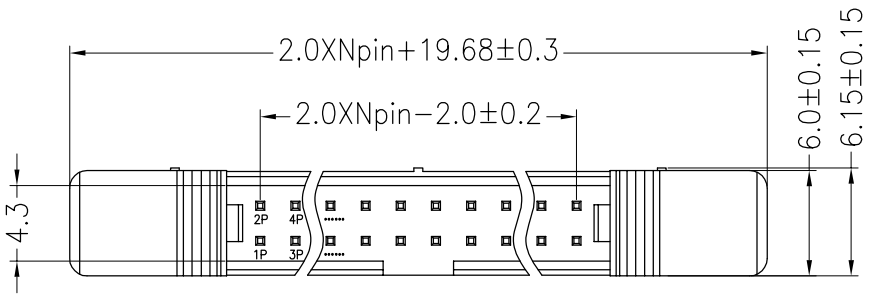


Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)

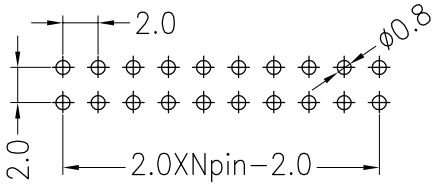


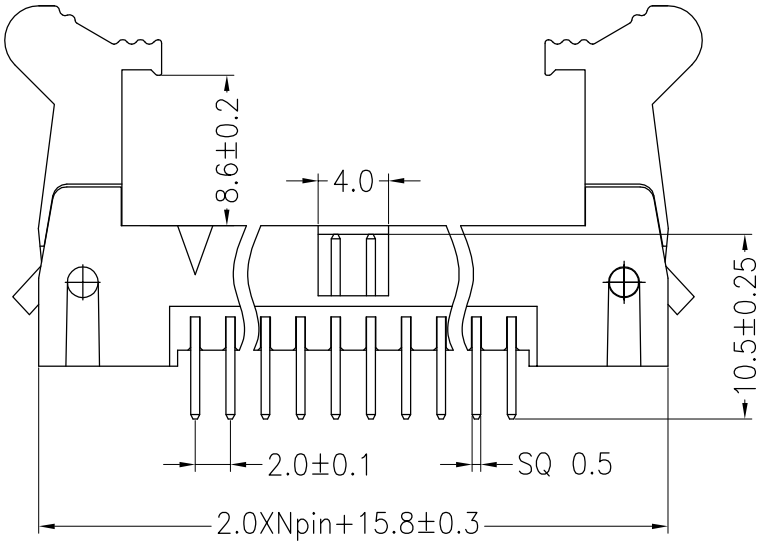


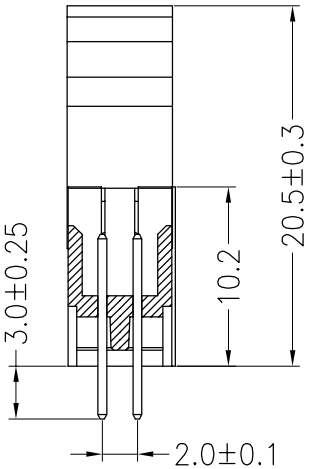


## Ordering Information

**3320 XX S XX X X L X 0X**

- No.of Pins: 6--64
- Contact Plating: G0:Gold Flash; G1:1U" Gold; G2:1.5U" Gold; G3:2U" Gold; G4:3U" Gold; G5:5U" Gold; S0:Gold Flash/Tin; SN:Tin
- Insulator Material Option: A=BK−PBT; C=BK−PA6T; D=BK−PA46; E=BK−PA9T; F=BK−LCP
- Color Type: B=Black; G=Grey
- Latch Type: L=Long Latch
- Packing: 0=PE Bag; A=Tray; T=Tube

| REV | DATE | MODIFICATION DESCRIPTION | CHANGE |
|---|---|---|---|
| A0 | 2012.10.05 | NEW DRAWING | |

| OPERATION | |
|---|---|
| X.X | ±0.30 |
| X.XX | ±0.20 |
| X.XXX | ±0.10 |
| Angle | ±3° |
| DIM | TOL |

| | | |
|---|---|---|
| DRAW | YiYuSheng | 12.10.05 |
| CHECK | | |
| APPROVE | | |

| | |
|---|---|
| SCALE | FIT |
| UNIT | mm |
| SIZE | A4 |
| SHEET | 1/1 |
| PROJ. | |

BESTCONN(WUHAN) TECHNOLOGY CO.,LTD
https://bscconnector.com/

| | |
|---|---|
| PART NO. | 3320XXSXXXXLX0X |
| TITLE: | 2.0 ejector header Npin 180°长耳 |