

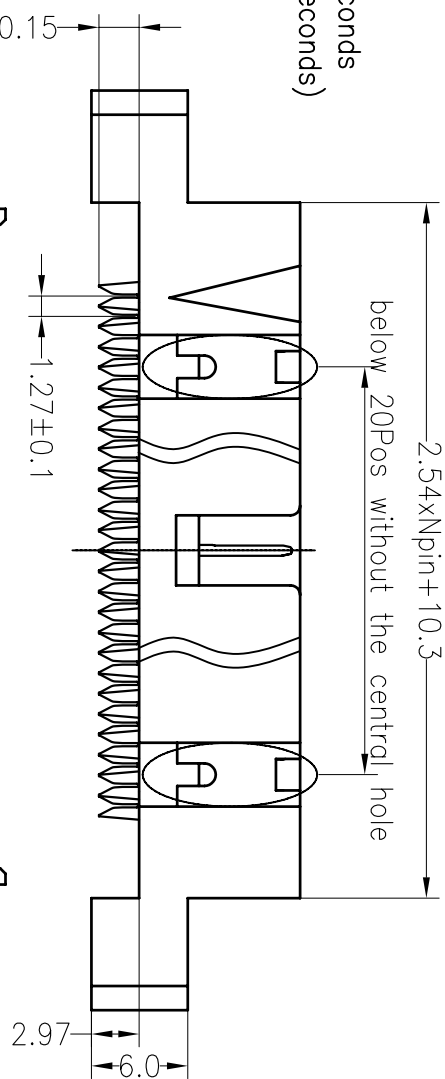


HSE ROHS

SPECIFICATIONS

Rated Current: 3.0AMP
 Contact Resistance: 20mΩ Max
 Withstand Voltage: 1000V AC/DC
 Insulation Resistance: 1000MΩ Min
 Operation Temperature: -40°c to +105°c

Contact Material: Brass
 Contact Plating: Au or Sn Over Ni
 Insulator Material: Polyester (UL94V-0)
 Standard: PBT
 Max. Processing Temp: 180°C for 30-60 seconds
 (200°C for 10 seconds)

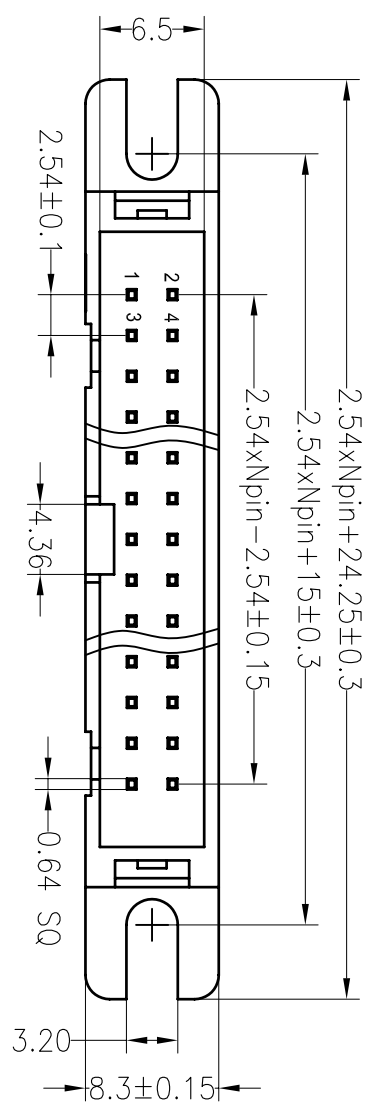

Ordering Information

3910 XX XX W X N 01

No. of Pins: 8---64P
 Contact Plating: G0:Gold Flash, G2:5U" Gold, G3:10U" Gold, G4:15U" Gold, G5:30U" Gold, S0:Gold Flash/Tin, SN:Tin
 Insulator Color: B=Black, G=Grey

OPERATION		DRAW		SCALE		FIT		PART NO.	
X.X	±0.30	YTuSheng		UNIT	mm	A4	1/1	3910XXXXXXN01	
X.XX	±0.20	12.03.28		SIZE	A4	1/1	1/1	2.54mm Box Header IDC-Type With Location hole Npin	
X.XXX	±0.10	CHECK		SHEET	1/1	PROJ.		BESTCONN(WUHAN) TECHNOLOGY CO.,LTD	
Angle	±3°	APPROVE		https://bsconnector.com/					
DIM	TOL	CHANGE		REV 1 DATE 2012.03.28 MODIFICATION DESCRIPTION					