
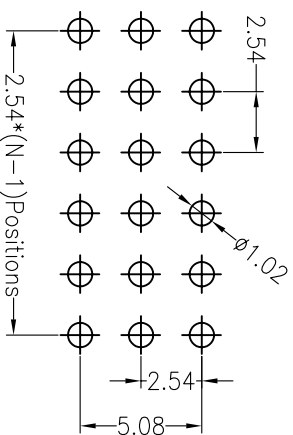


### SPECIFICATIONS

Rated Current:3.0AMP  
Contact Resistance:20mΩ Max  
Withstand Voltage:1000V AC/DC  
Insulation Resistance:1000MΩ Min  
Operation Temperature:-40°c to +105°c


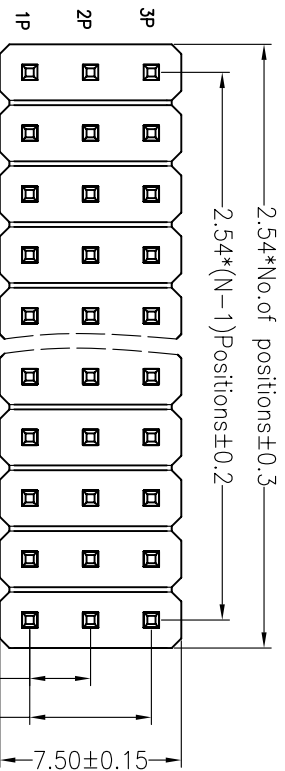


Contact Material:Brass  
Contact Plating:Au Over Ni  
Insulator Material:Polyester(UL94V-0)  
Standard: PBT  
Max.Processing Temp: 180°C for 30-60 seconds  
(200°C for 10 seconds)

## Ordering Information

1225 13 XX X N XX S XXX X 01

No. of Pins Per Row	Insulator Material Option	Contact Plating	Pin Length	Packing
1x40	A=BK-PBT	G0:Gold Flash	0=PE Bog	A=Troy
2x40	B=BK-PA66	G1:1U" Gold	T=Tube	P=Tube+Cap
3x40	C=BK-PA6T	G2:1.5U" Gold	R=Reel+Cap	M=Reel+Mylar
1--40	D=BK-PA46	G4:3U" Gold	S0:Gold Flash/Tin	
2--80	E=BK-PA9T		SN:1Tin	
3--120	F=BK-LCP			

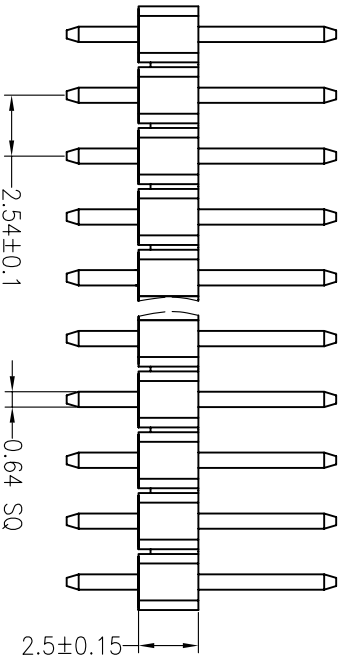

Dimension antitheses list			
ITEM	PA	PC	L
Standard	6.00	3.00	11.50
Alternate			

OPERATION		DRAW		SCALE		FIT		BESTCONN(WUHAN) TECHNOLOGY CO.,LTD	
X.X	±0.30	YH/Sheng	12.03.28	UNIT	mm			<a href="https://bsconnector.com/">https://bsconnector.com/</a>	
X.XX	±0.20	CHECK		SIZE	A4	SHEET		PART NO.	122513XXXXXSXXXX01
X.XXX	±0.10	APPROVE		Angle	±3°	PROJ.		2.54PH H2.5mm Three Row 180°	
REV	DATE	MODIFICATION DESCRIPTION		CHANGE		TOL		TITLE:	
A0	2012.03.28	NEW DRAWING							
1									