







SPECIFICATIONS

Rated Current:3.0AMP
 Contact Resistance:20mΩ Max
 Withstand Voltage:1000V AC/DC
 Insulation Resistance:1000MΩ Min
 Operation Temperature:-40°c to +105°c

Contact Material:Brass
 Contact Plating:Au Over Ni
 Insulator Material:Polyester(UL94V-0)
 Standard: PA6T
 Max.Processing Temp: 230°C for 30-60 seconds
 (260°C for 10 seconds)

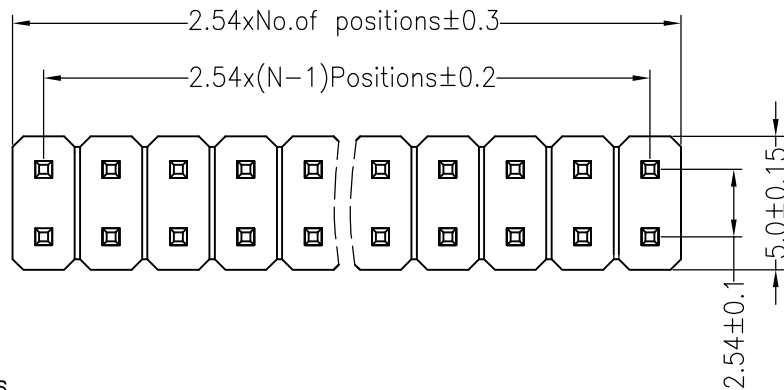

Recommended P.C.B Layout(Top Side)
 (PCB BOARD TOLERANCE±0.05)

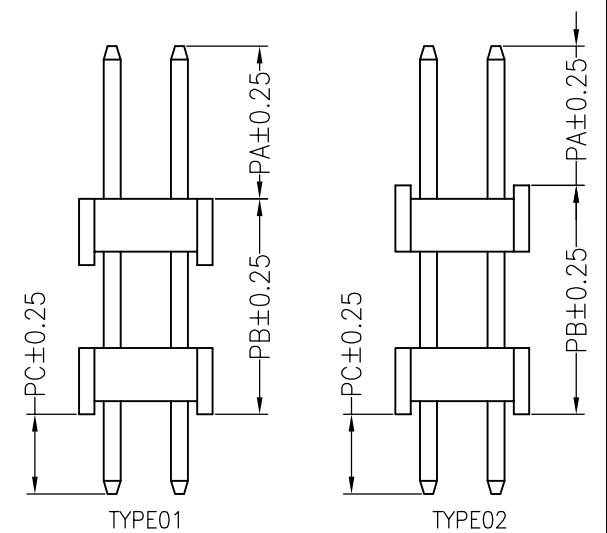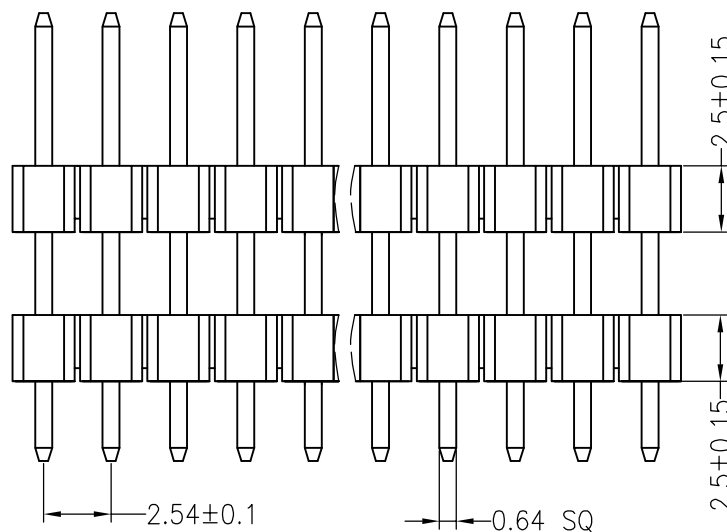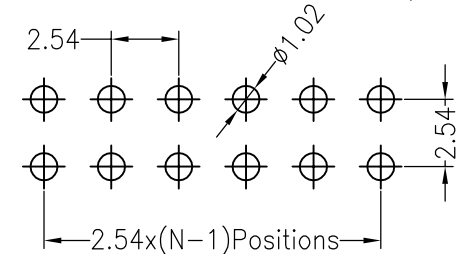

Dimension antitheses list				
ITEM	PA	PB	PC	L
Standard	6.00	5.00	3.00	14.0
Alternate				

Ordering Information

1225 22 XX X N XX S XXX X0X(1,2)

- No.of Pins Per Row 2*1~2x40
- Insulator Material Option: A=BK-PBT, C=BK-PA6T, D=BK-PA46, E=BK-PA9T, F=BK-LCP
- Contact Plating: G0:Gold Flash, G1:3U" Gold, G2:5U" Gold, G3:10U" Gold, G4:15U" Gold, G5:30U" Gold, S0:Gold Flash/Tin, SN:Tin
- Pin Length
- Packing: 0=PE Bag, A=Tray, T=Tube

				OPERATION		DRAW	Ben	12.04.18	SCALE	FIT	BESTCONN(WUHAN) TECHNOLOGY CO.,LTD https://bsconnector.com/	
				X.X	±0.30				UNIT	mm		
				X.XX	±0.20	CHECK			SIZE	A4	PART NO.	122522XXXXXXSXXX0X(1,2)
				X.XXX	±0.10				SHEET	1/1	TITLE:	2.54PH Dual Row Double Plastic 180° H=2.5
A0	2012.04.18	NEW DRAWING		Angle	±3°	APPROVE			PROJ.	◆		
REV	DATE	MODIFICATION DESCRIPTION		DIM	TOL							