







SPECIFICATIONS

Rated Current:3.0AMP
 Contact Resistance:20mΩ Max
 Withstand Voltage:1000V AC/DC
 Insulation Resistance:1000MΩ Min
 Operation Temperature:-40°C to +105°C

Contact Material:Brass
 Contact Plating:Au or Sn Over Ni
 Insulator Material:Polyester(UL94V-0)
 Standard: PA6T
 Max.Processing Temp: 230°C for 30-60 seconds
 (260°C for 5 seconds)

Recommended P.C.B Layout(Top Side)
 (PCB BOARD TOLERANCE±0.05)

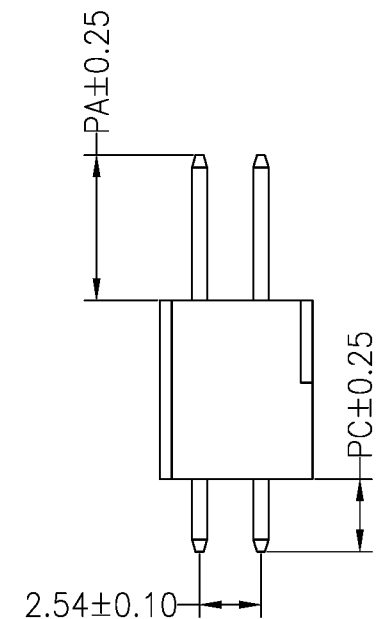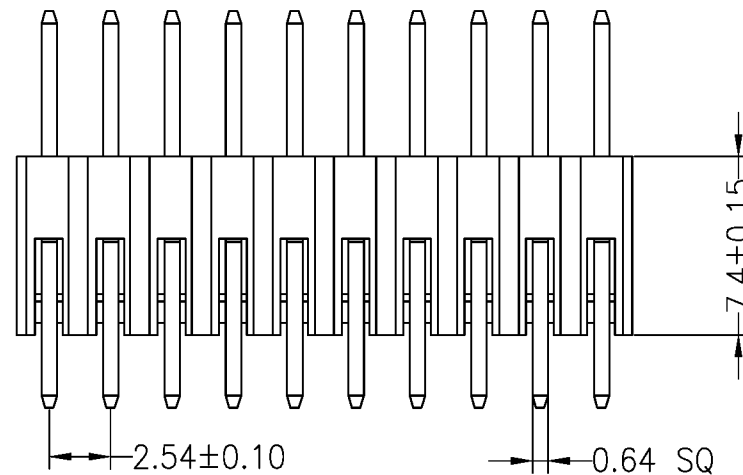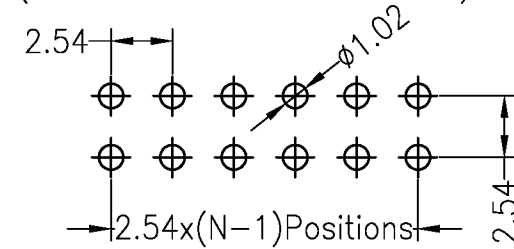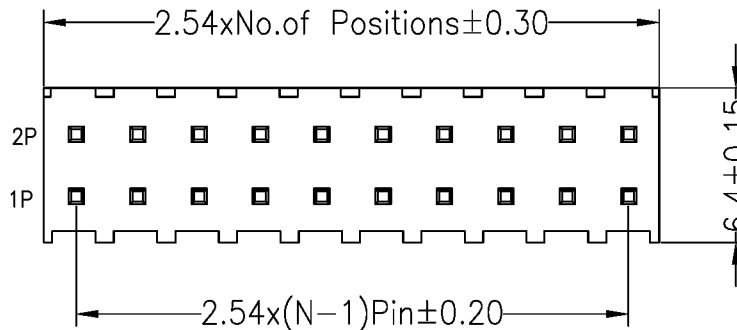

Ordering Information

1274 12 XX X N XX S XXX X 01

- No.of Pins Per Row 2x40 2--80
- Insulator Material Option
 A=BK-PBT
 B=BK-PA66
 C=BK-PA6T
 D=BK-PA46
 F=BK-LCP
- Contact Plating
 G0:Gold Flash
 G2:50U" Gold
 G3:10U" Gold
 G4:15U" Gold
 G5:30U" Gold
 S0:Gold Flash/Tin
 SN:Tin
- Pin Length
- Packing
 O=PE Bag
 A=Tray
 T=Tube
 P=Tube+Cap
 R=Reel+Cap

Dimension antitheses list			
ITEM	PA	PC	L
Standard	6.00	3.00	16.4
Alternate			

				OPERATION		DRAW	YiYuSheng	12.11.11	SCALE	FIT	BESTCONN(WUHAN) TECHNOLOGY CO.,LTD https://bscconnector.com/	
				X.X	±0.30				UNIT	mm		
				CHECK				SIZE	A4	PART NO. 127412XXXNXXSXXX01		
				X.XX	±0.20			SHEET	1/1			
A0	2012.11.11	NEW DRAWING		APPROVE				PROJ.		TITLE: 2.54PH 2xNpin H7.40mm 180°		
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	DIM	TOL							