



SPECIFICATIONS

Rated Current:1.5AMP
 Contact Resistance:20mΩ Max
 Withstand Voltage:500V AC/DC
 Insulation Resistance:1000MΩ Min
 Operation Temperature: -40°c to +105°c

Contact Material:Brass
 Contact Plating:Au or Sn Over Ni
 Insulator Material:Polyester(UL94V-0)
 Standard: PA6T
 Max.Processing Temp: 230°C for 30-60 seconds
 (260°C for 5 seconds)

Ordering Information





1320 12 XX X N XX R XXX X 02

No. of Pins Per Row 2~40P
 Insulator Material Option
 A=BK-PBT
 C=BK-PA6T
 D=BK-PA46
 E=BK-PA9T
 F=BK-LCP

Contact Plating
 G0:Gold Flash
 G1:1U" Gold
 G2:1.5U" Gold
 G3:2U" Gold
 G4:3U" Gold
 G5:5U" Gold

Pin Length
 SO:Gold Flash/Tin
 SN:Tin

Packing
 A=Tray
 T=Tube
 O=Pe
 R=Tape&Reel
 P=Tube&Reel

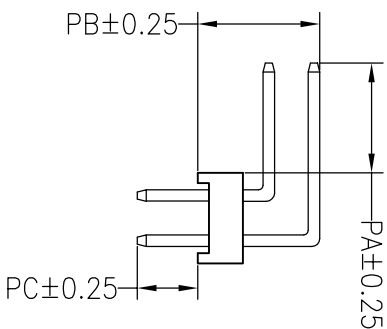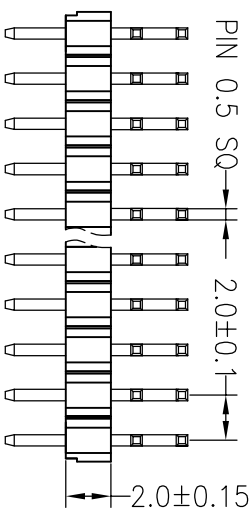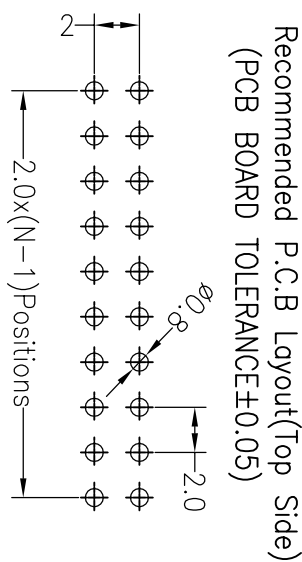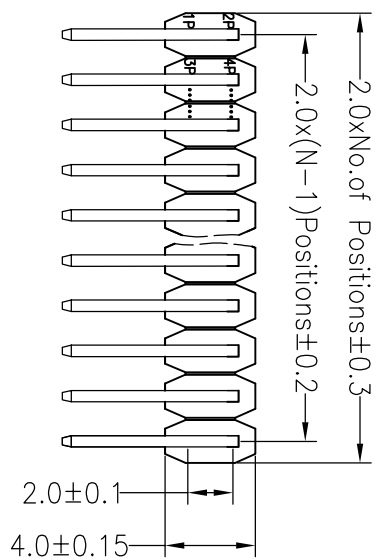

Dimension antitheses list				
ITEM	PA	PB	PC	Length
Standard	4.00	5.40	2.80	10.50
Alternate				14.50

OPERATION		DRAW	Y YuSheng	19.09.18	SCALE	FIT
X.X	±0.30					
X.XX	±0.20	CHECK			UNIT	mm
X.XXX	±0.10				SIZE	A4
Angle	±3°	APPROVE			SHEET	1/1
DIM	TOL				PROJ.	☐ ↗

JILIN 深圳市锦凌电子有限公司
 SHENZHEN JINLING ELECTRONIC CO.,LTD
 Tel: 86-755-2997-5806/5802 Fax: 86-755-2997-5892

PART NO. 132012XXXXXX02
 TITLE: 2.0PH 2xNpin H2.0mm 90度弯

REV	DATE	MODIFICATION DESCRIPTION	CHANGE
A0	2019.09.18	NEW DRAWING	