
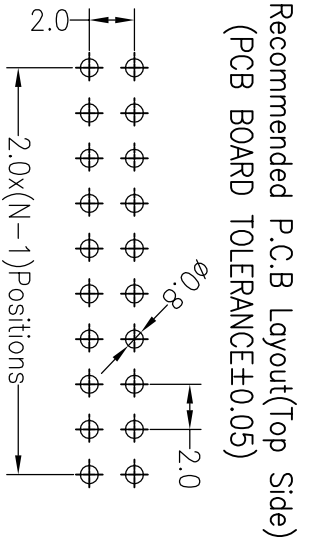


**SPECIFICATIONS**

Rated Current:1.5AMP  
 Contact Resistance:20mΩ Max  
 Withstand Voltage:500V AC/DC  
 Insulation Resistance:1000MΩ Min  
 Operation Temperature:-40°c to +105°c



Contact Material:Brass  
 Contact Plating:Au or Sn Over Ni  
 Insulator Material:Polyester(UL94V-0)  
 Standard: PA6T  
 Max.Processing Temp: 230°C for 30-60 seconds  
 (260°C for 5 seconds)

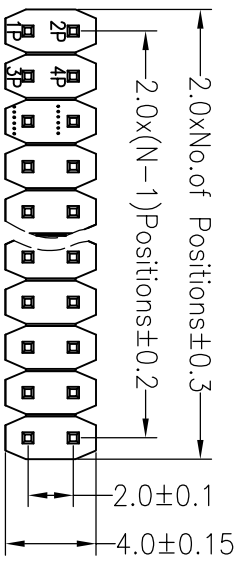

**Ordering Information**

1320 12 XX X N XX S XXX X 01

- No. of Pins: 2x1~2x40
- Insulator Material Option:
  - A=BK-PBT
  - C=BK-PA6T
  - D=BK-PA46
  - E=BK-PA9T
  - F=BK-LCP
- Contact Plating:
  - G0:Gold Flash
  - G1:1U" Gold
  - G2:1.5U" Gold
  - G3:2U" Gold
  - G4:3U" Gold
  - G5:5U" Gold
  - G6:10U" Gold
  - G7:15U" Gold
  - S0:Gold Flash/Fin
  - SN:Tin
- Pin Length
- Packaging:
  - A=Troy
  - T=Tube
  - O=Pe
  - R=Tube&Reel
  - P=Tube+Cap

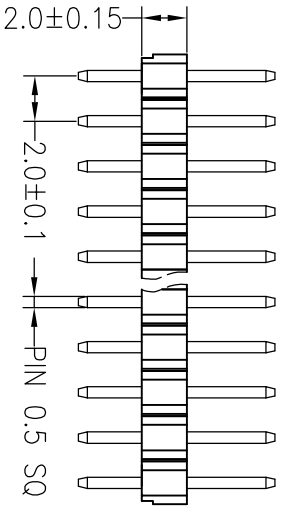

ITEM	PA	PC	L
Standard	3.90	2.80	8.70

		OPERATION		DRAW		BEN		SCALE		FIT		BESTCONN(WUHAN) TECHNOLOGY CO.,LTD	
		X.X	±0.30			19.09.17		UNIT		mm		https://bsconnector.com/	
		X.XX	±0.20	CHECK				SIZE		A4		PART NO.	
		X:XXX	±0.10					SHEET		1/1		132012XXXXXXSXXX01	
REV		DATE	MODIFICATION DESCRIPTION	CHANGE		APPROVE		PROJ.		TITLE:		2.0PH 2xNpin H2.0mm 180°	
1		2		3		4		5		6		7	
A0		2019.09.17		NEW DRAWING									