
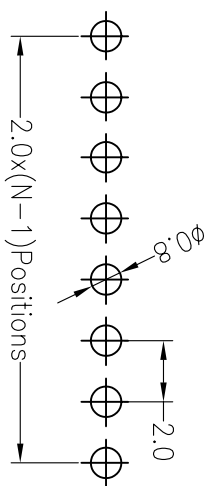


SPECIFICATIONS

Rated Current: 1.5AMP
 Contact Resistance: 20mΩ Max
 Withstand Voltage: 500V AC/DC
 Insulation Resistance: 1000MΩ Min
 Operation Temperature: -40°C to +105°C



Contact Material: Brass
 Contact Plating: Au or Sn Over Ni
 Insulator Material: Polyester (UL94V-0)
 Standard: PA6T
 Max. Processing Temp: 230°C for 30-60 seconds
 (260°C for 5 seconds)

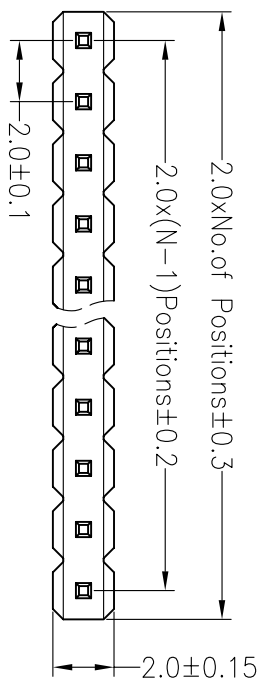

Ordering Information

1320 21 XX X N XX S XXX X 02

No. of Pins Per Row 1x40
 1--40
 Insulator Material Option
 A=BK-PBT
 B=BK-PA66
 C=BK-PA6T
 D=BK-PA46
 F=BK-LCP
 Contact Plating
 G0:Gold Flash
 G2:5U" Gold
 G3:10U" Gold
 G4:15U" Gold
 G5:30U" Gold
 S0:Gold Flash/Tin
 SN:Tin
 Pin Length
 Packing
 0=PE Bag
 A=Troy
 T=Tube

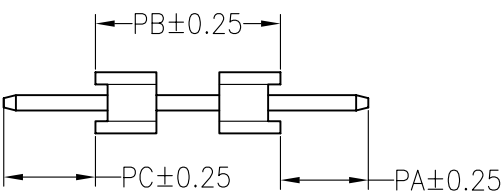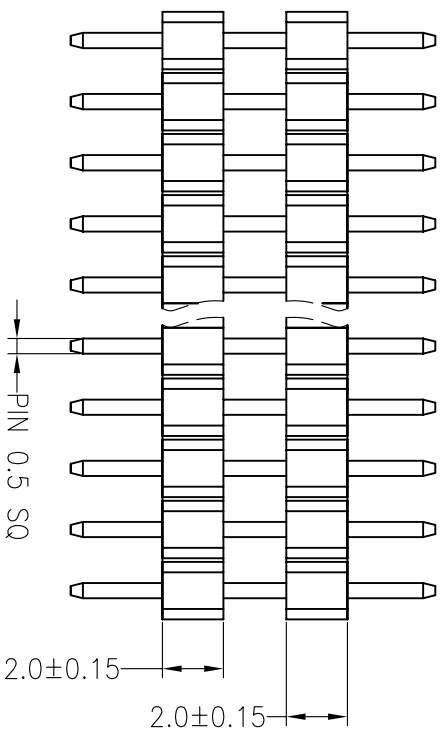

Dimension antitheses list				
ITEM	PA	PB	PC	L
Standard	4.00	4.00	4.00	12.0
Alternate				

BESTCONN(WUHAN) TECHNOLOGY CO.,LTD
<https://bsconnector.com/>

PART NO. 132021XXXXXXSXXXX02

TITLE: 2.0PH 1xNpin 2+H2.0mm Single 180°

OPERATION		DRAW		SCALE		FIT	
X.X	±0.30	BEN	12.04.11	UNIT	mm	SIZE	A4
X.XX	±0.20	CHECK		SHEET	1/1	PROJ.	1/1
X.XXX	±0.10	APPROVE					
Angle	±3°						
DIM	TOL						