

SPECIFICATIONS





Rated Current:1.5AMP
 Contact Resistance:20mΩ Max
 Withstand Voltage:500V AC/DC
 Insulation Resistance:1000MΩ Min
 Operation Temperature:-40°c to +105°c

Contact Material:Brass
 Contact Plating:Au or Sn Over Ni
 Insulator Material:Polyester(UL94V-0)
 Standard: PA6T
 Max.Processing Temp: 230°C for 30-60 seconds
 (260°C for 5 seconds)

Ordering Information

1320 22 XX X N XX R XXX X 01

No. of Pins Per Row: 1x40, 2x40, 1--40, 2--80
 Insulator Material Option: A=BK-PBT, C=BK-PA6T, D=BK-PA46, E=BK-PA9T, F=BK-LCP
 Contact Plating: G0:Gold Flash, G1:1U" Gold, G2:1.5U" Gold, G3:2U" Gold, G4:3U" Gold, S0:Gold Flash/Tin, SN:Tin
 Pin length: A=Troy, T=Tube, O=Pe, R=Top&Reel, P=Tube&Reel
 Packing: A=Tray

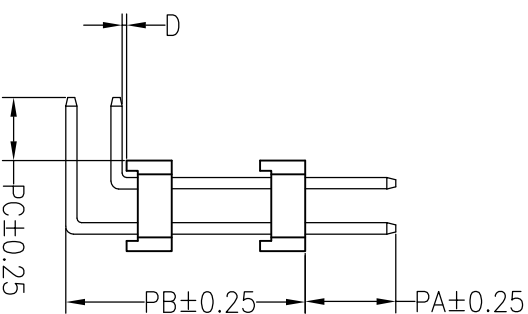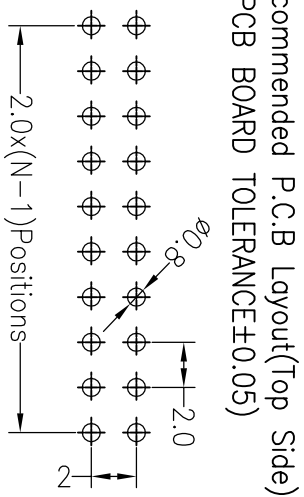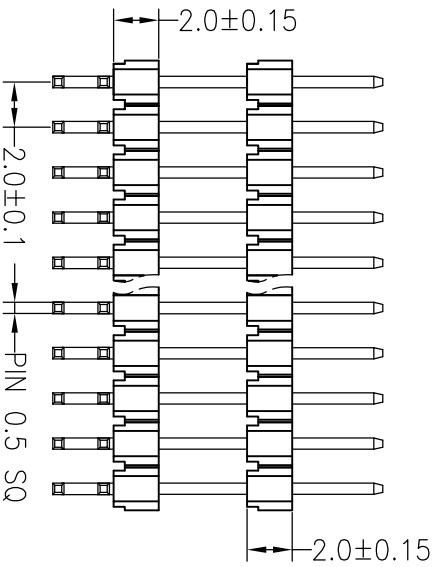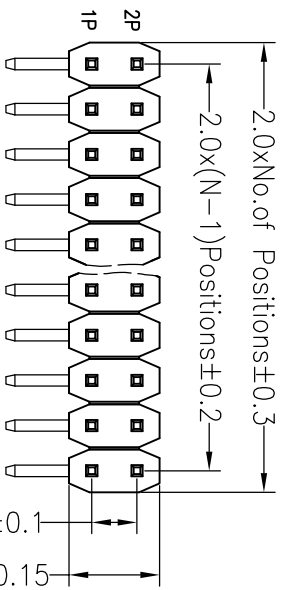

Dimension antitheses list						
ITEM	PA	PB	PC	D	L短	L长
Alternate	4.00	6.70	2.80	0.10	12.00	16.00

OPERATION		DRAW		SCALE		FIT		TITLE	
DIM	TOL	APPROVE	YTYuSheng	19.09.19	UNIT	mm	A4	1/1	2.0PH 2xNpin 2+H2.0mm 90°
X.X	±0.30	CHECK			SIZE	A4			
X.XX	±0.20				SHEET	1/1			
X.XXX	±0.10				PROJ.				
Angle	±3°								

BESTCONN(WUHAN) TECHNOLOGY CO.,LTD
<https://bsccconnector.com/>

PART NO. 132022XXXXXXRXXXX01

REV	DATE	MODIFICATION DESCRIPTION	CHANGE
A0	2019.09.19	NEW DRAWING	
1			