

SPECIFICATIONS

Rated Current: 1.5AMP
 Contact Resistance: 20mΩ Max
 Withstand Voltage: 500V AC/DC
 Insulation Resistance: 1000MΩ Min
 Operation Temperature: -40°C to +105°C

Contact Material: Brass
 Contact Plating: Au or Sn Over Ni
 Insulator Material: Polyester (UL94V-0)
 Standard: PA6T
 Max. Processing Temp: 230°C for 30-60 seconds
 (260°C for 5 seconds)

Ordering Information

1320 22 XX X N XX S XXX X 01


No. of Pins Per Row: 1x40, 2x40, 3x40, 1---40, 2---80, 3---120

Insulator Material Option: A=BK-PBT, B=BK-PA66, C=BK-PA6T, D=BK-PA46, F=BK-LCP




Contact Plating: G0: Gold Flash, G2: 5U" Gold, G3: 10U" Gold, G4: 15U" Gold, G5: 30U" Gold, S0: Gold Flash/Tin, SN: Tin

Pin Length: A=PE, 0=PE Bog, T=Tube

Packing: A=PE, 0=PE Bog, T=Tube

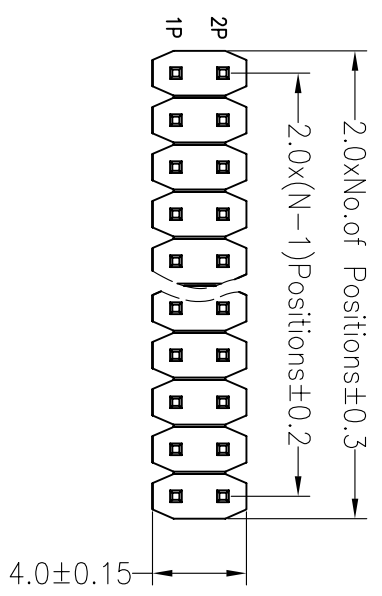

Recommended P.C.B Layout (Top Side)
 (PCB BOARD TOLERANCE ±0.05)

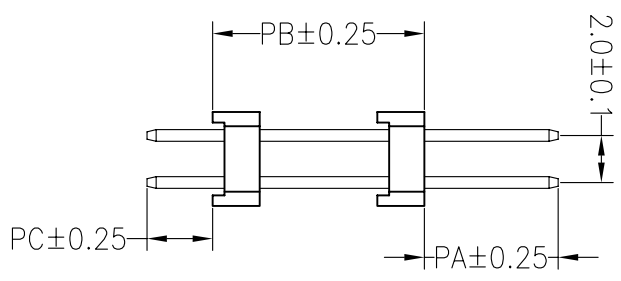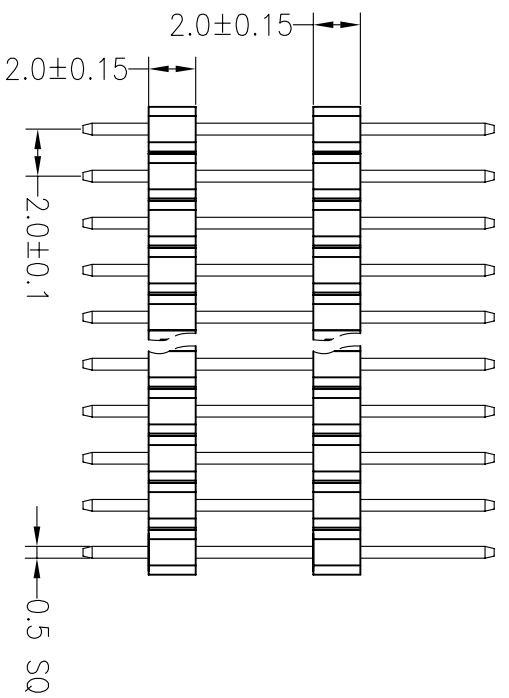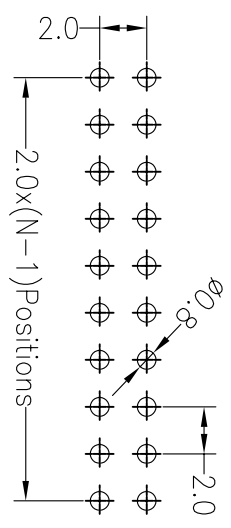

| Dimension antitheses list | | | | |
|---------------------------|------|------|------|-------|
| ITEM | PA | PB | PC | L |
| Standard | 4.00 | 4.00 | 2.80 | 10.80 |
| Alternate | | | | |

| OPERATION | | DRAW | | SCALE | | FIT | | PART NO. | |
|------------------------------------|-------|---------|-----------|---------------------|-----|-----|-----|----------------------------|--|
| X.X | ±0.30 | | YTYuSheng | UNIT | mm | A4 | 1/1 | 132022XXXXXXSXXXX01 | |
| X.XX | ±0.20 | CHECK | 12.04.11 | SIZE | A4 | | | | |
| X.XXX | ±0.10 | | | SHEET | 1/1 | | | | |
| Angle | ±3° | APPROVE | | PROJ. | | | | | |
| DIM | TOL | | | | | | | | |
| BESTCONN(WUHAN) TECHNOLOGY CO.,LTD | | TITLE: | | PART NO. | | FIT | | TITLE: | |
| https://bsconnector.com/ | | | | 132022XXXXXXSXXXX01 | | A4 | | 2.0PH 2xNpin 2*H2.0mm 180° | |