HSF RoHS

FILE NO :E362810

SPECIFICATIONS
Rated Current:3.0AMP
Contact Resistance:30mΩ Max
Withstand Voltage:1000V AC/DC
Insulation Resistance:1000MΩ Min
Operation Temperature:−40°c to +105°c

Contact Material:Brass
Contact Plating:Au or Sn Over Ni
Insulator Material:Polyester(UL94V−0)
Standard: PBT
Max.Processing Temp: 180°C for 30−60 seconds
(200°C for 5 seconds)

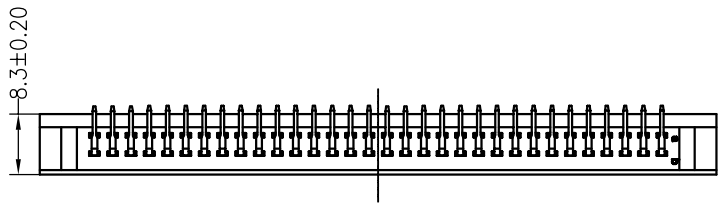

Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)

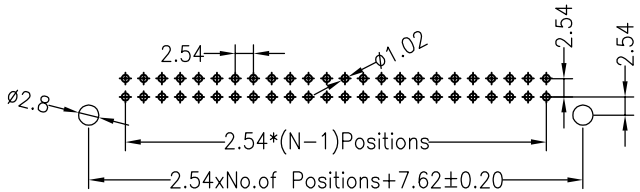

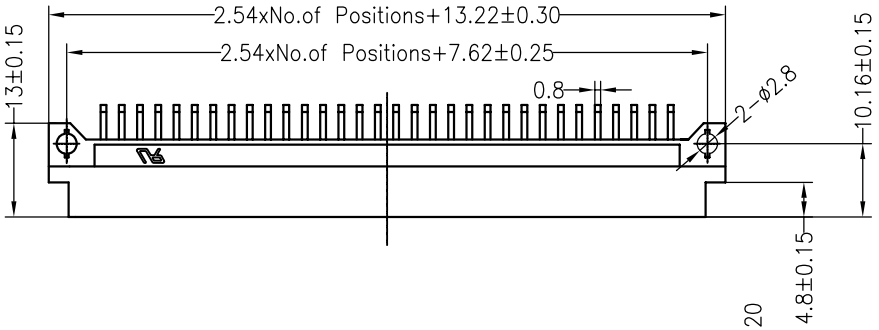



Ordering Information

35112 XX A M R XX BNA1

- No.of Pins: 16P,20P,32P,44P, 48P,64P
- Contact Type: M=male
- Contact Plating:
  G0:Gold Flash
  S2:1.5U" Gold
  S3:2U" Gold
  S4:3U" Gold
  S5:5U" Gold
  S0:Gold Flash/Tin
  SN:Tin

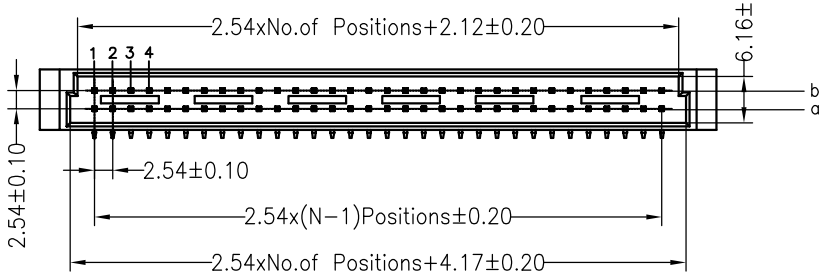

Dimension antitheses list	
ITEM	A
Standard	2.90
Alternate	

REV	DATE	MODIFICATION DESCRIPTION	CHANGE
A0	2019.09.16	NEW DRAWING	

OPERATION				
X.X	±0.30	DRAW	YiYuSheng	19.09.16
X.XX	±0.20	CHECK		
X.XXX	±0.10			
Angle	±3°	APPROVE		
DIM	TOL			

SCALE	FIT
UNIT	mm
SIZE	A4
SHEET	1/1
PROJ.	

BESTCONN(WUHAN) TECHNOLOGY CO.,LTD
https://bscconnector.com/

PART NO.	35112XXAMRXXBNA1
TITLE:	欧式插座 公座 90度 2xNPIN 成品系列图