




FILE NO: ZS02810

SPECIFICATIONS

Rated Current: 3.0AMP
 Contact Resistance: 30mΩ Max
 Withstand Voltage: 1000V AC/DC
 Insulation Resistance: 1000MΩ Min
 Operation Temperature: -40°c to +105°c

Contact Material: Brass
 Contact Plating: Au or Sn Over Ni
 Insulator Material: Polyester (UL94V-0)
 Standard: PBT
 Max. Processing Temp: 180°C for 30-60 seconds
 (200°C for 10 seconds)

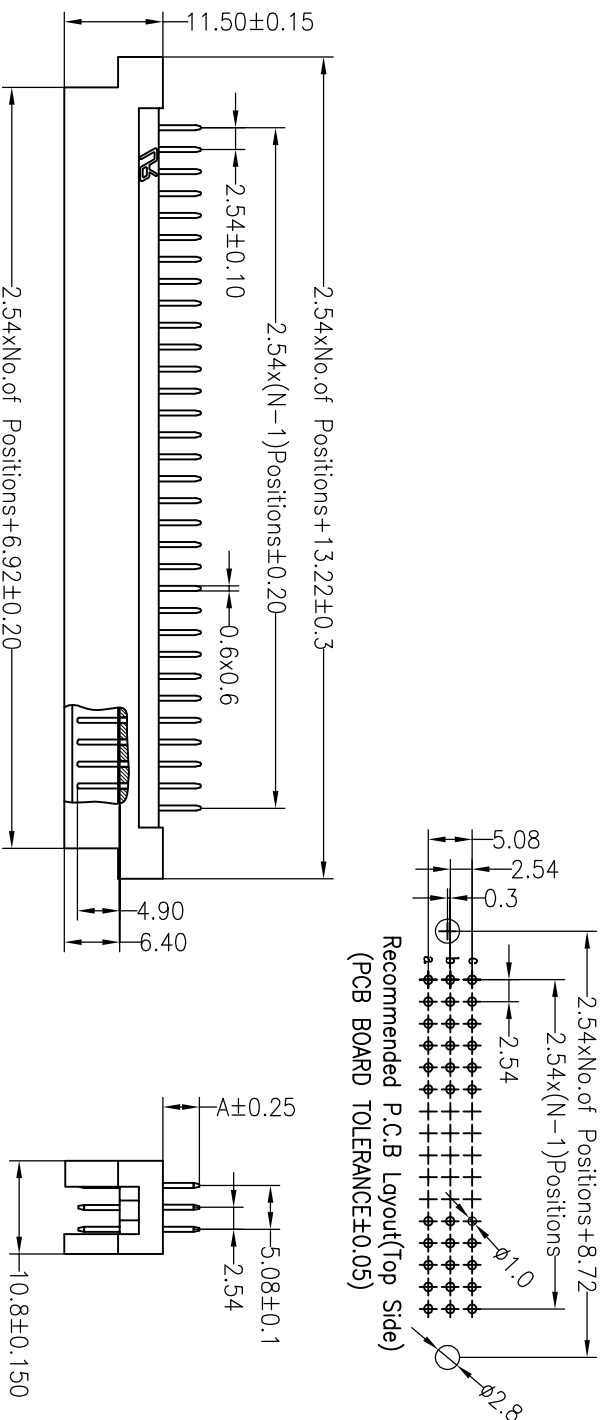

Ordering Information

35113 XX A M S XX BNA1

No. of Pins
21~120P
Contact Type
F=Female
M=Male

Contact Plating
G0:Gold Flash
S0:Gold Flash/Tin
S1:2U" Gold/Tin
S2:5U" Gold/Tin
S3:10U" Gold/Tin
S4:15U" Gold/Tin
S5:30U" Gold/Tin
SN:Tin

| | |
|---------------------------|------|
| Dimension antitheses list | |
| ITEM | A |
| Standard | 4.00 |
| Alternate | |

BESTCONN(WUHAN) TECHNOLOGY CO.,LTD

<https://bscconnector.com/>

| | | | | | | | | |
|-----------|------------|--------------------------|----------|-------|-----|------------------------------------|--|--|
| OPERATION | | DRAW | | SCALE | FIT | BESTCONN(WUHAN) TECHNOLOGY CO.,LTD | | |
| X.X | ±0.30 | YYuSheng | 14.09.16 | UNIT | mm | PART NO. | | |
| X.XX | ±0.20 | CHECK | | SIZE | A4 | 35113XXAMSSXXBNA1 | | |
| X.XXX | ±0.10 | APPROVE | | SHEET | 1/1 | TITLE: | | |
| REV | DATE | MODIFICATION DESCRIPTION | | PROJ. | | DIN41612 3xNpin Male 180° | | |
| 1 | 2014.09.16 | NEW DRAWING | | | | | | |
| | | CHANGE | | | | | | |
| | | | | | | | | |
| | | | | | | | | |
| | | | | | | | | |