
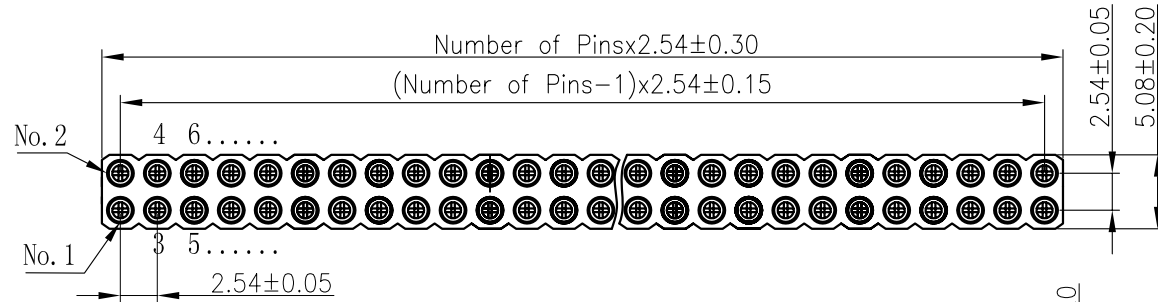


**Technical Specs:**

Insulator: Black glass filled polyester PPS / PBT  
 Flammability: UL 94V-0  
 Sleeve: Brass (H59-3)  
 Contact clip(6 finger): Beryllium copper(C17300)  
 Accepted pin: Ø0.40 to 0.56mm,  
 Forces: (polished steel gauge Ø0.43mm)  
 --Insertion 2 N typ  
 --Withdrawal 1 N typ  
 Mechanical life: min500 cycles  
 Rated current: 3A  
 Contact resistance: max 10mΩ  
 Dielectric resistance: Min 1000MΩ  
 Operating temperature:-40°C to +105°C  
 Soldering temperature:260°C,10s max

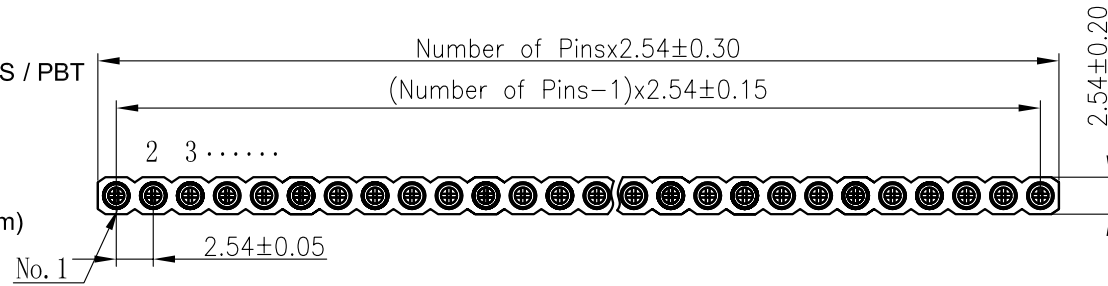

**Ordering Information**


3620 30 X XX S XX 074 01

Insulator Type Code  
 1: Single row  
 2: Double row

No. of Pins  
 1x40Pins  
 2x40Pins

Contact Plating  
 SN: Tin  
 G0: Gold Flash  
 G2: 2U"Gold  
 G3: 3U"Gold  
 G4: 5U"Gold  
 G5: 10U"Gold  
 S0: Gold Flash/Tin  
 Standard: G0

Pin Length  
 074=7.43mm

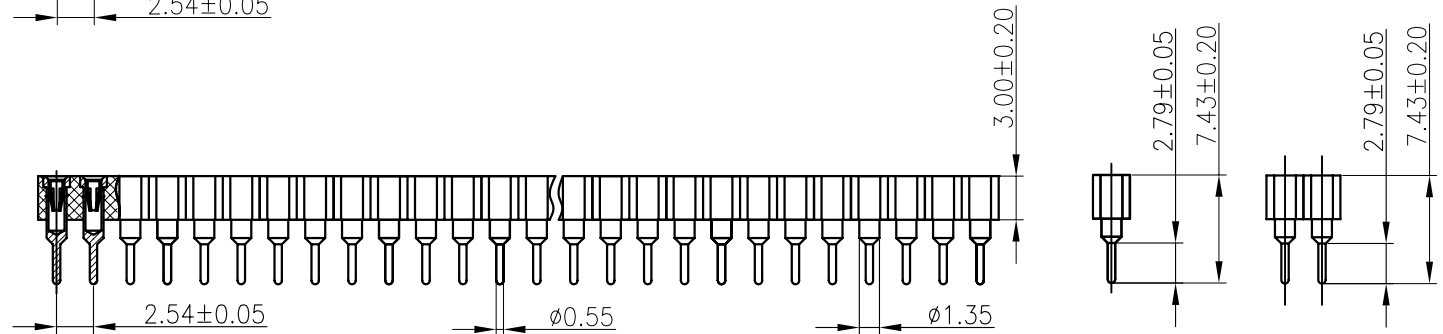

				OPERATION		DRAW	YiYuSheng	12.03.28	SCALE	FIT	BESTCONN(WUHAN) TECHNOLOGY CO.,LTD <a href="https://bscconnector.com/">https://bscconnector.com/</a>	
				X.X	±0.30				UNIT	mm		
				CHECK		APPROVE			SIZE	A4	PART NO.	362030XXXSXX07401
				APPROVE					SHEET	1/1	TITLE:	2.54x3.0 Machine Female Header 180° L=7.43
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	DIM	TOL	PROJ.						