HSF RoHS

FILE NO :E362810

Masterials

Pin (outer sleeve) :Brass,machined, CuZn38Pb2
Clip(contact 4 finger) :Beryllium copper,heat treated
Plating(outer sleeve) :
Tin plated : 1.25u"m/50u"nickel,5um/200u"Tin
Plating clip(contact):
1.25um/50 u"nickel,gold or tin plating
Insulator body(black) : Glass filled thermoplastic polyester UL94V-0 electrical
Current rating : 3 Amps/contact max.
Contact resistance : 10mΩ /contact
Insulation resistance : 1000M at V=100V
Operating voltage : 60 AC/DC

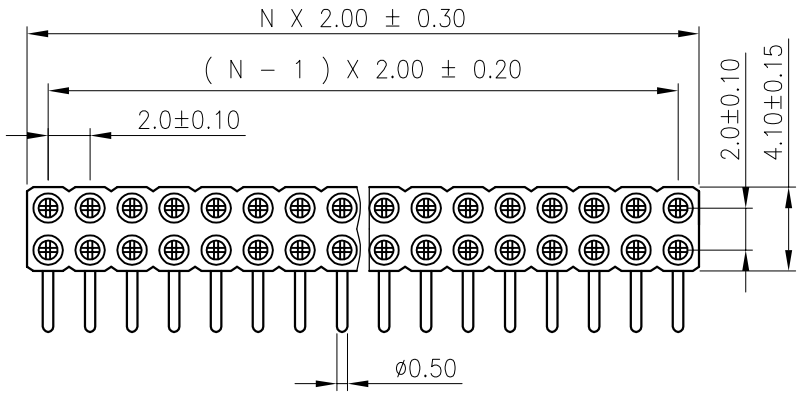

注：整条总长+0.5

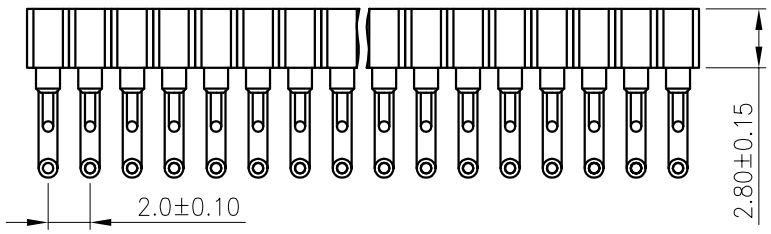

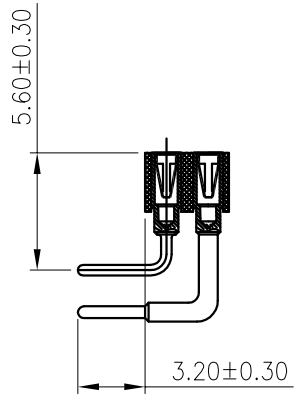

Ordering Information

3622 28 2 XX R XX 095 01

- XX: No.of Pins 2x40Pin
- XX: Contact Plating
  G0:Gold Flash
  S0:Gold Flash/Tin
  S1:3u"Gold/Tin
  S2:5u"Gold/Tin
  S3:10u"Gold/Tin
  S4:15u"Gold/Tin
- 095: Length 095=9.5mm

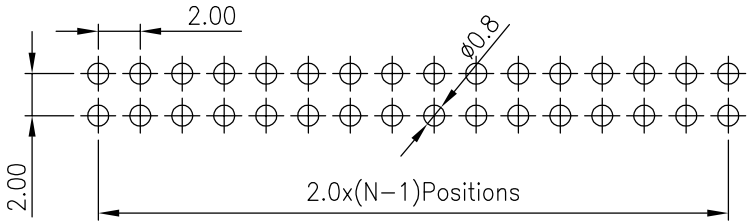

Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)

REV	DATE	MODIFICATION DESCRIPTION	CHANGE
A0	2018.12.13	NEW DRAWING	

OPERATION				
DRAW	yiyusheng	18.12.13		
CHECK				
APPROVE				

DIM	TOL
X.X	±0.30
X.XX	±0.20
X.XXX	±0.10
Angle	±3°

SCALE	FIT
UNIT	mm
SIZE	A4
SHEET	1.5/1
PROJ.	

BESTCONN(WUHAN) TECHNOLOGY CO.,LTD
https://bscconnector.com/

PART NO.	3622−282XXRXX09501
TITLE:	2.0x2.8mm Machine Socket 90° L=9.5/13.5mm