
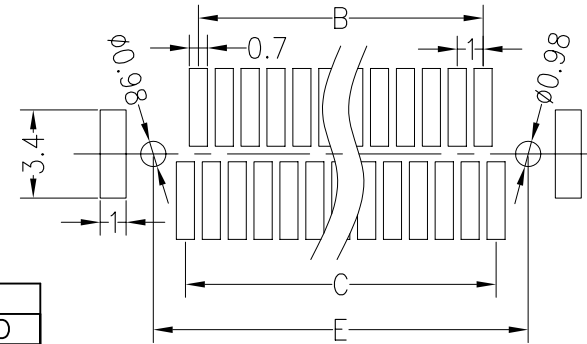


HSF RoHS



Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)

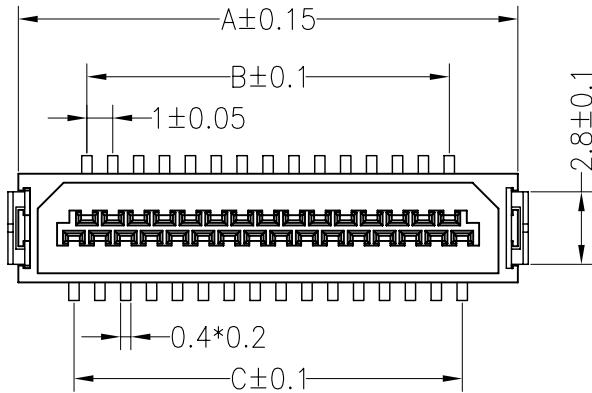

NO. OF Contacts	Dimensions				
	A	B	C	E	D
21pin	14.30	9.00	10.00	13.10	16.10
31pin	19.30	14.00	15.00	18.10	21.10
41pin	24.30	19.00	20.00	23.10	26.10
51pin	29.30	24.00	25.00	28.10	31.10

**SPECIFICATIONS
PERFORMANCE**

Electical Rating: AC/DC 50V 0.5A
 Insulation Resistance: 500MΩ
 Withstang Volt: 200V AC/minute
 Opratng Temperature: -40*to+105*
 Material
 Contact: Phosphor Bronze Gold-Plated
 Housing: PA46

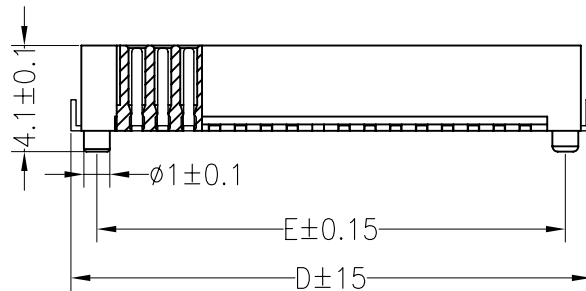

Ordering Information

3712 - M XXX 033 XX F X 01

F=Female
M=Male

No.of pins
21,31,41
.51P

Plastic Height
033=3.3mm

Contact Plating
G0:Gold Flash
G2:5U" Gold
G3:10U" Gold
G4:15U" Gold
G5:30U" Gold
S0:Gold Flash/Tin

Packing
T:Tube
R:Reel

				OPERATION		DRAW	BEN	12.03.28	SCALE	FIT	BESTCONN(WUHAN) TECHNOLOGY CO.,LTD https://bscconnector.com/	
				X.X	±0.30				UNIT	mm		
				X.XX	±0.20	CHECK			SIZE	A4	PART NO.	
				X.XXX	±0.10	APPROVE			SHEET	1/1	3712-MXXX033XXFX01	
REV	DATE	MODIFICATION DESCRIPTION		CHANGE	DIM	TOL			PROJ.	◆	TITLE:	1.00BTB NPIN H3.30 Male
A0	2012.03.28	NEW DRAWING										