


HSE ROHS

SPECIFICATIONS

Rated Current:1.0AMP
 Contact Resistance:20mΩ Max
 Withstand Voltage:500V AC/DC
 Insulation Resistance:1000MΩ Min
 Operation Temperature: -40°C to +105°C

Contact Material:Phosphor Bronze
 Contact Plating:Sn Over Ni
 Insulator Material:Polyester(UL94V-0)
 Standard: PBT
 Max.Processing Temp: 180°C for 30-60 seconds
 (200°C for 10 seconds)

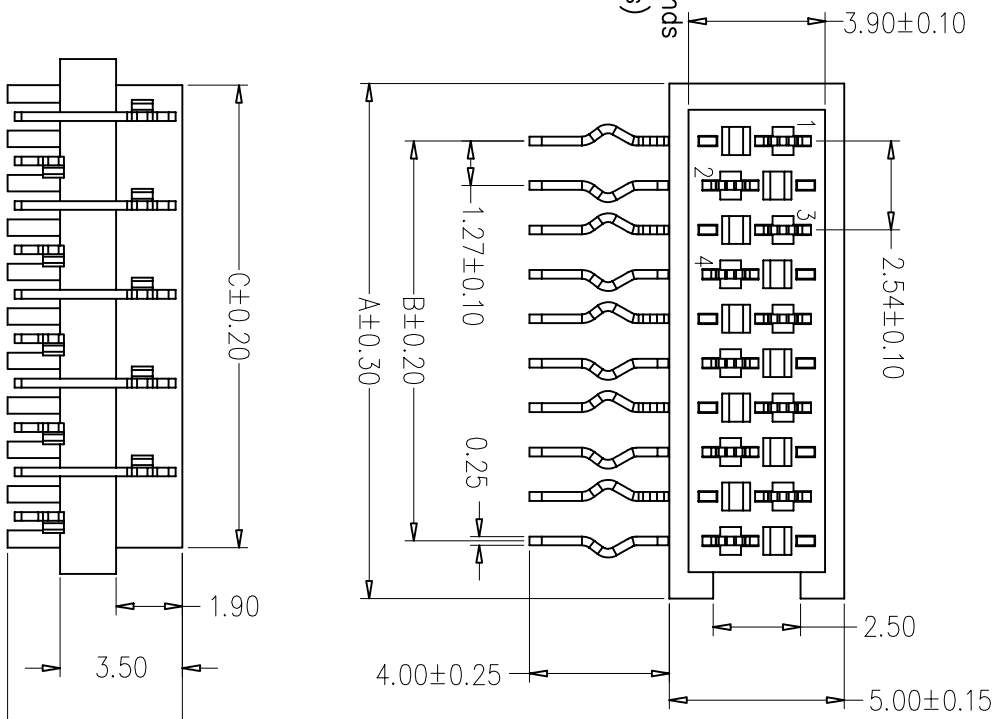


PINS	A	B	C
4	6.98	3.81	5.60
6	9.52	6.35	8.14
8	12.06	8.89	10.68
10	14.60	11.43	13.22
12	17.14	13.97	15.76
14	19.68	16.51	18.30
16	22.22	19.05	20.84
18	24.76	21.59	23.38
20	27.30	24.13	25.92
24	32.38	29.21	31.00
26	34.92	31.75	33.54

Ordering Information

4000 XX F R SN XN T 01

No. of Pins: 04~26P
 Contact Plating: SO:Gold Flash/Tin
 Insulator Material: A=PBT, E=PA46
 Pocking: T=Tube

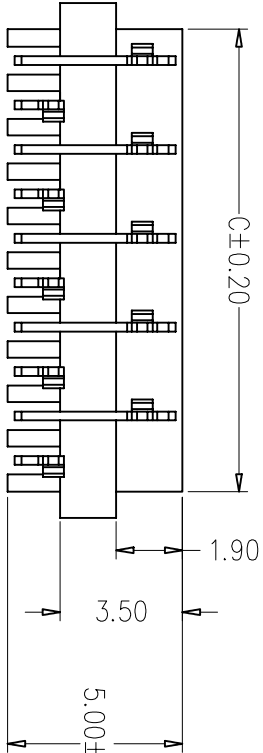

OPERATION		DRAW		BEN		SCALE		FIT		BESTCONN(WUHAN) TECHNOLOGY CO.,LTD	
X.X		±0.30		12.04.11		UNIT		mm		PART NO. 4000XXFRSNXNT01 https://bsconnector.com/	
X.XX		±0.20		CHECK		SIZE		A4			
X.XXX		±0.10		APPROVE		SHEET		1/1		TITLE: MICRO MATCH FEMALE-90°DIP TYPE	
Angle		±3°		PROJ.		PROJ.		☐			
DATE		MODIFICATION DESCRIPTION		CHANGE		DIM		TOL			
REV		NEW DRAWING									
A0		2012.04.11									
1		2		3		4		5		6	
7		8		9							