
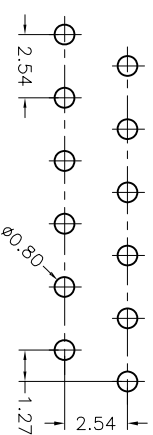


# HSE ROHS

## SPECIFICATIONS

Rated Current:1.0AMP  
 Contact Resistance:20mΩ Max at DC 100mA  
 Withstand Voltage:500V AC/DC 50Hz For 1minute  
 Insulation Resistance:1000MΩ Min  
 Operation Temperature:-40°C to +105°C  
 Contact Material:Brass  
 Contact Plating:Au Over Ni  
 Insulator Material:Polyester(Ul94V-0)  
 Standard: PA46/PBT



Recommended P.C.B Layout(Top Side)  
 (PCB BOARD TOLERANCE±0.05)

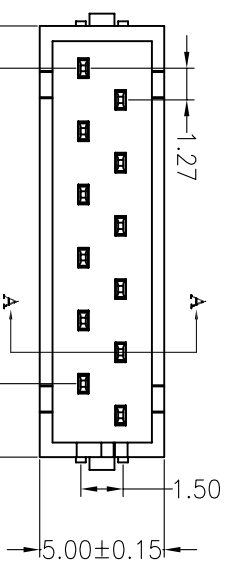

## Ordering Information

4000 - XX M S SN X N X 01

No. of Pins 4-26P  
 Contact Plating S0:Gold Flash/Tin SN:Tin  
 Insulator Material Option A=BK-PBT D=BK-PA46  
 Packing T=Tube R=Reel

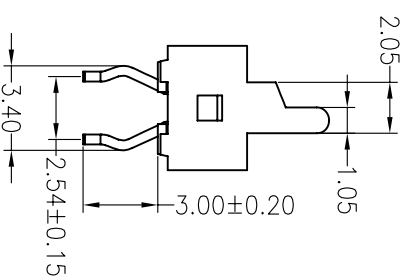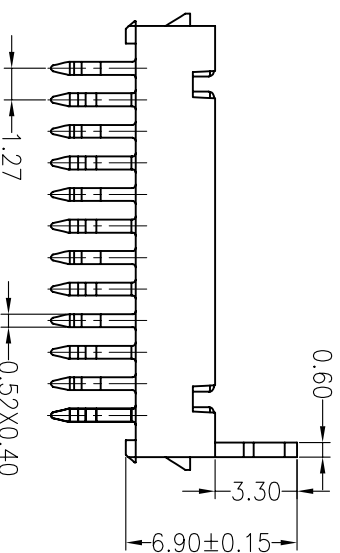

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	OPERATION		DRAW	WZG	SCALE		FIT	BESTCONN(WUHAN) TECHNOLOGY CO.,LTD <a href="https://bsconnector.com/">https://bsconnector.com/</a>
				Angle	TOL			UNIT	SIZE		
A0	2012.03.28	NEW DRAWING		X.X	±0.30		14.07.10	mm	A4		PART NO. 4000-XXMSSNXX01 TITLE: 1.27红色IDC公座板端DIP 有缺口
				X.XXX	±0.10	CHECK			1/1		
						APPROVE		PROJ.			

1 2 3 4 5 6 7 8 9