
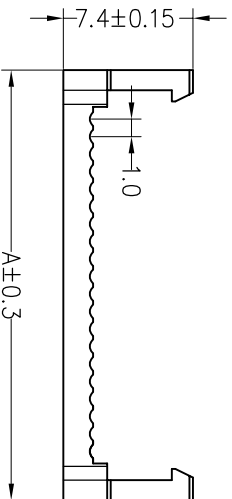
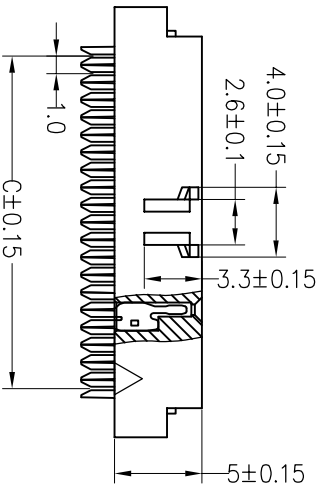




SPECIFICATIONS

Rated Current: 1.0AMP
 Contact Resistance: 20mΩ Max
 Withstand Voltage: 1000V AC/DC
 Insulation Resistance: 1000MΩ Min
 Operation Temperature: -40°C to +105°C

Contact Material: Phosphor Bronze
 Contact Plating: Au or Sn Over Ni
 Insulator Material: Polyester(U194V-0)
 Standard: PBT
 Max. Processing Temp: 180°C for 30-60 seconds
 (200°C for 10 seconds)

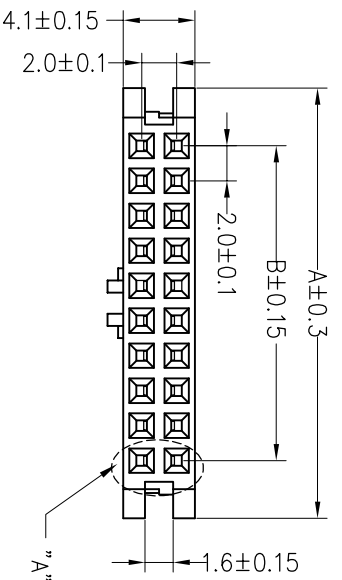

Pin	Dimension mm		
	A	B	C
06	10.60	4.00	5.00
08	12.60	6.00	7.00
10	14.60	8.00	9.00
12	16.60	10.00	11.00
14	18.60	12.00	13.00
16	20.60	14.00	15.00
20	24.60	18.00	19.00
26	30.60	24.00	25.00
30	34.60	28.00	29.00
34	38.60	32.00	33.00
36	40.60	34.00	35.00
40	44.60	38.00	39.00
44	48.60	42.00	43.00
50	54.60	48.00	49.00
60	64.60	58.00	59.00

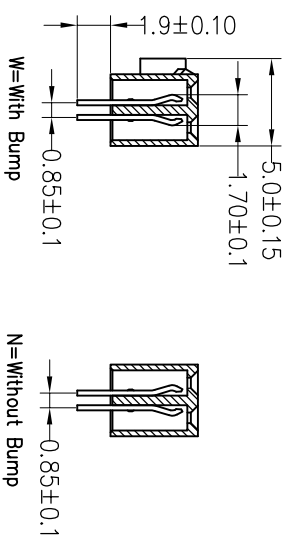

Ordering Information

5324 XX Y B XX B W 01

No. of Pins: 06~60P
 Contact Plating: NO: Gold Flash/Ni, GO: Gold Flash, NI: Ni
 Option Type: W=With Bump, N=Without Bump

OPERATION		DRAW		SCALE		FIT		BESTCONN(WUHAN) TECHNOLOGY CO.,LTD	
X.X	±0.30	Y.YuSheng	16.01.16	UNIT	mm	A4	1/1	https://bsconnector.com/	
X.XX	±0.20	CHECK		SIZE	A4	PART NO.		5324XXYBXXBW01	
X.XXX	±0.10	APPROVE		SHEET	1/1	TITLE:		2.00 NPin Fc(DC) F-Type	
Angle	±3°	CHANGE		PROJ.					
DIM	TOL	4		5		6		7	
MODIFICATION DESCRIPTION		3		5		6		7	
REV	DATE	3		5		6		7	
A0	2016.01.16	NEW DRAWING							
1									