

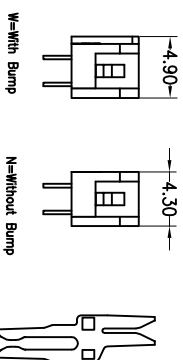
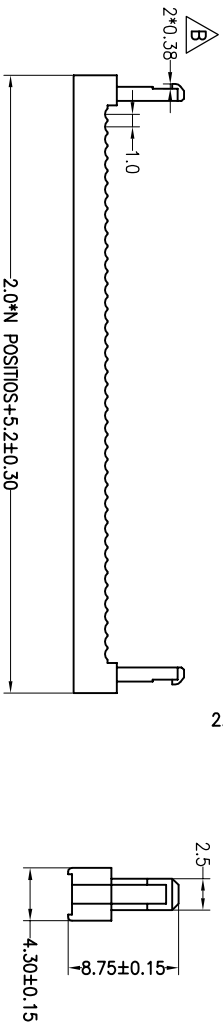


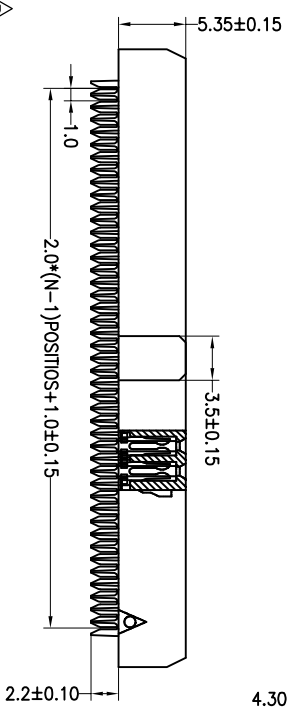

SPECIFICATIONS

Rated Current: 1.0AMP
 Contact Resistance: 20mΩ Max
 Withstand Voltage: 500V AC/DC
 Insulation Resistance: 1000MΩ Min
 Operation Temperature: -40°C to +105°C


Contact Material: Brass
 Contact Plating: Au or Sn Over Ni
 Insulator Material: Polyester (UL94V-0)
 Standard: PBT
 Max. Processing Temp: 180°C for 30-60 seconds
 (200°C for 10 seconds)

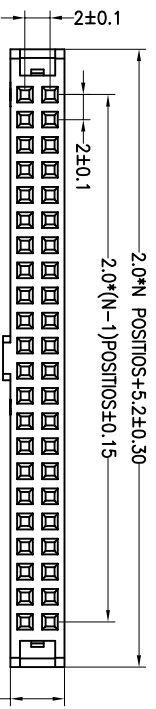

Ordering Information

5326 XX Y B XX B X 01

- No. of Pins: 06~80P
- Contact Plating: S0:Gold Flash/Ni, S1:3U" Gold/Ni, S2:3U" Gold/Ni, S3:10U" Gold/Ni, S4:20U" Gold/Ni, S5:30U" Gold/Ni, SN:NI
- Option Type: W=With Bump, N=Without Bump

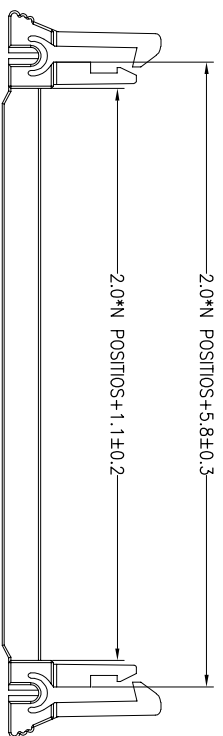

Strain Reliefe

| | | | | | | | | | |
|--------------------------|--|----------|--|-------|--|-------|--|---------------------------------|--|
| OPERATION | | DRAW | | SCALE | | FIT | | TITLE: | |
| X.X | | YYuSheng | | mm | | A4 | | PART NO. 5326XXYBXXBX01 | |
| ±0.30 | | 16.12.27 | | UNIT | | SHEET | | 2.00 FC(DC) Y-Type NPin 两件套+螺絲扣 | |
| X.XX | | CHECK | | SIZE | | 1/1 | | | |
| ±0.20 | | | | A4 | | | | | |
| X:XXX | | APPROVE | | PROJ. | | | | | |
| ±0.10 | | | | | | | | | |
| Angle | | | | | | | | | |
| ±3° | | | | | | | | | |
| TOL | | | | | | | | | |
| DIM | | | | | | | | | |
| CHANGE | | | | | | | | | |
| MODIFICATION DESCRIPTION | | | | | | | | | |
| NEW DRAWING | | | | | | | | | |
| 中盖铆打厚度由0.34改为0.38 | | | | | | | | | |
| 2016.12.27 | | | | | | | | | |
| 2016.01.16 | | | | | | | | | |
| DATE | | | | | | | | | |
| REV | | | | | | | | | |
| A | | | | | | | | | |
| 1 | | | | | | | | | |

BESTCONN(WUHAN) TECHNOLOGY CO.,LTD
<https://bsconnector.com/>