HSF RoHS

FILE NO :E362810

SPECIFICATIONS
Rated Current:1.0AMP
Contact Resistance:20mΩ Max
Withstand Voltage:500V AC/DC
Insulation Resistance:1000MΩ Min
Operation Temperature:−40°C to +105°C

Contact Material:Phosphor Bronze
Contact Plating:Au Over Ni
Insulator Material:Polyester(UL94V−0)
Standard: PBT
Max.Processing Temp: 180°C for 30−60 seconds
(200°C for 10 seconds)

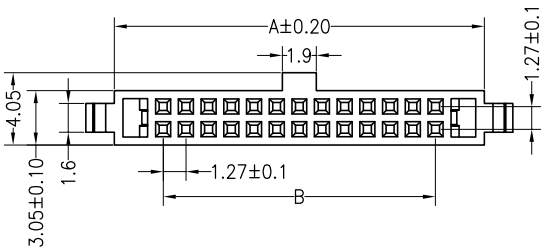

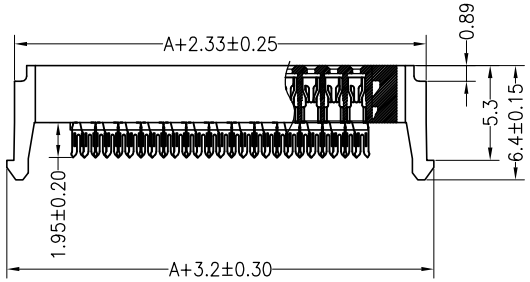



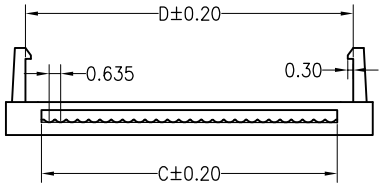



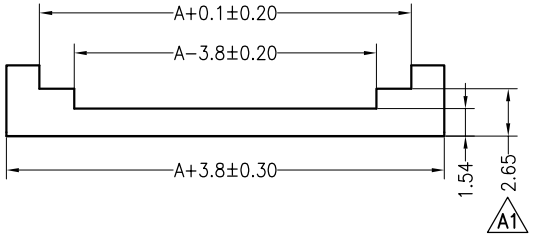



Pin	Dimension mm			
	A	B	C	D
06	8.00	2.54	4.20	5.30
08	9.27	3.81	5.47	6.57
10	10.54	5.08	6.74	7.84
12	11.81	6.35	8.01	9.11
14	13.08	7.62	9.28	10.38
16	14.35	8.89	10.55	11.65
18	15.62	10.16	11.82	12.92
20	16.89	11.43	13.09	14.19
24	19.43	13.97	15.63	16.73
26	20.70	15.24	16.90	18.00
30	23.24	17.78	19.44	20.54
34	25.78	20.32	21.98	23.08
40	29.59	24.13	25.79	26.89
44	32.13	26.67	28.33	29.43
50	35.94	30.48	32.14	33.24
60	42.29	36.83	38.49	39.59
64	44.83	39.37	41.03	42.13
68	47.37	41.91	43.57	44.67
80	54.99	49.53	51.19	52.29

Ordering Information

5332 XX U P G0 B W 04

- XX: No.of Pins 6~80P
- G0: Contact Plating G0:Gold Flash

REV	DATE	MODIFICATION DESCRIPTION	CHANGE
A1	2020.03.28	更改反压扣尺寸	
A0	2017.09.22	NEW DRAWING	

OPERATION				
X.X	±0.30	DRAW	YiYuSheng	20.03.28
X.XX	±0.20	CHECK		
X.XXX	±0.10			
Angle	±3°	APPROVE		
DIM	TOL			

SCALE	FIT
UNIT	mm
SIZE	A4
SHEET	1/1
PROJ.	

BESTCONN(WUHAN) TECHNOLOGY CO.,LTD
https://bscconnector.com/

PART NO.	5332XXUPG0BW04
TITLE:	1.27 FC(IDC) NPin(三件式系列)