

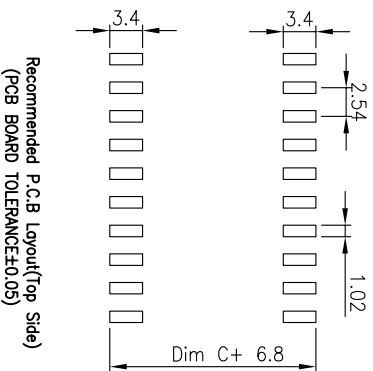




FILE NO: E362810

Technical Specs:


Insulator: Black glass filled polyester PBT-GF30-FR
 Flammability: UL 94V-0
 Sleeve: Brass
 Contact clip(4/6 finger): Beryllium copper(C17200)
 Accepted pin: $\varnothing 0.38$ to 0.64mm
 Forces: (polished steel gauge $\varnothing 0.43\text{mm}$)
 -Insertion 2 N typ
 1 N typ
 -Withdrawal min100 cycles
 Mechanical life: min100 cycles
 Rated current: 1A
 Contact resistance: max 10m Ω
 Dielectric resistance: Min 1000V RMS

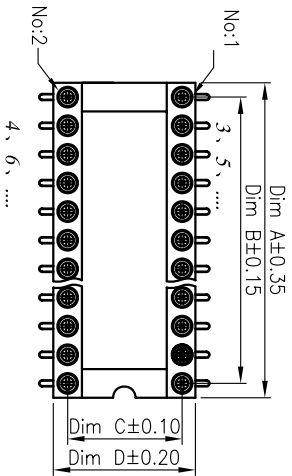

Ordering Information

7210 30 X XX M XX 740 T 01

N=7,62
W=15,24
No. of Pins 4-40P
Contact Plating
G1:1U" Gold
G2:1.5U" Gold
G3:2U" Gold
G4:3U" Gold
S0:Gold Flash/Tin
SN:1in
Length 740=7.40mm

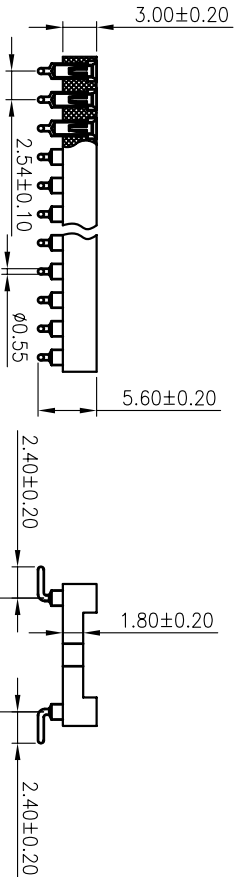

Contact	Dim A	Dim B	Dim C	Dim D
6	7.62	5.08	7.62	10.16
8	10.16	7.62	7.62	10.16
10	12.70	10.16	7.62	10.16
14	17.78	15.24	7.62	10.16
16	20.32	17.78	7.62	10.16
18	22.86	20.32	7.62	10.16
20	25.40	22.86	7.62	10.16
24	30.48	27.94	7.62	10.16
28	35.56	33.02	7.62	10.16
16	20.32	17.78	10.16	12.70
20	25.40	22.86	10.16	12.70
22	27.94	25.40	10.16	12.70
24	30.48	27.94	10.16	12.70
28	35.56	33.02	10.16	12.70
24	30.48	27.94	15.24	17.78
28	35.56	33.02	15.24	17.78
32	40.64	38.10	15.24	17.78
40	50.80	48.26	15.24	17.78

BESTCONN(WUHAN) TECHNOLOGY CO.,LTD
<https://bsconnector.com/>

PART NO. 721030XXXXXX074T01

TITLE: 2.54圆孔10座SMT L=7.40加长型

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	OPERATION		DRAW	WZG	15.02.03	SCALE		FIT	BESTCONN(WUHAN) TECHNOLOGY CO.,LTD
				Angle	TOL				UNIT	mm		
A0	2014.04.01	NEW DRAWING		X.X	±3°	CHECK			A4	1/1		
				X.XX	±0.10							
				X.XXX	±0.10							
				APPROVE								

1 2 3 4 5 6 7 8 9